

Information and Data

**CPSC 217: Introduction to Computer Science for Multidisciplinary
Studies I**
Jul 2021 - CBE


Jonathan Hudson, Ph.D.
Instructor
Department of Computer Science
University of Calgary

Wednesday, June 2, 2021

Copyright © 2021



What is Information?

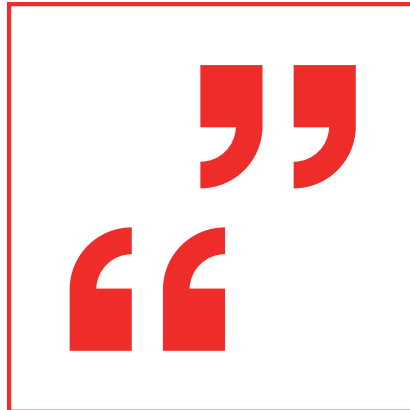

Etymology: Latin, “to give form to” or “to form an idea of”




Definition: The state of being of an object or system of interest

What is Data?



Data: raw facts, representation of information, no context



Encoding: The translation of information into data

(Decoding the other direction)



Data represents information

Information Processing

A change of information in any manner detectable by an observer



Using a computer?

Encode information into data

Process the data

Translate data back into information



Moral: computers process **data**, not information – it is **our responsibility to interpret the data correctly.**

Storing Data

All data in a computer is either a 0 or 1

Called a bit (binary digit)

Electrically, this is a switch that is either open or closed



Encoding schemes translate integers, real numbers, letters, pictures, ... into bits

Boolean Data

Has two possible values

False

True

Easily encoded using a single bit

0: False

1: True

Integer Data

How do we represent the numbers 5, 24,
or 367 using only ones and zeros?

Simplest idea:

$$11111 = 5$$

$$11111 \ 11111 \ 11111 \ 11111 \ 1111 = 24$$

Not practical for large integers!

Other ideas?



Number Systems

- Decimal (Base 10)
 - 10 distinct symbols (0,1,2,3,4,5,6,7,8,9)
 - Each digit is a factor of 10 larger than the digit to its right

- Examples:

$$5 = 5 \times 1$$

$$24 = 2 \times 10 + 4 \times 1$$

$$367 = 3 \times 100 + 6 \times 10 + 7 \times 1$$



Number Systems

- Decimal (Base 10)
 - 10 distinct symbols (0,1,2,3,4,5,6,7,8,9)
 - Each digit is a factor of 10 larger than the digit to its right

- Examples:

$$5 = \mathbf{5} \times 10^0$$

$$24 = \mathbf{2} \times 10^1 + \mathbf{4} \times 10^0$$

$$367 = \mathbf{3} \times 10^2 + \mathbf{6} \times 10^1 + \mathbf{7} \times 10^0$$

Number Systems



THIS IS A POSITIONAL SYSTEM – THE POSITION WITHIN THE NUMBER IMPACTS THE FACTOR BY WHICH THE DIGIT IS MULTIPLIED.



CHOICE OF BASE 10 IS (SOMEWHAT) ARBITRARY –
CAN USE ANY INTEGER BASE ≥ 1



NOTE: THERE IS NOTHING SPECIAL ABOUT
BASE 10 – IT'S JUST WHAT WE ARE USED TO!

Binary Data

Number Systems

Binary (Base 2)

- 2 distinct symbols (0,1)
- Each digit is a factor of 2 larger than the digit to its right

Base 10: hundreds, tens, ones

Base 2: eights, fours, twos, ones

Counting in Binary

0	==	0
1	==	1
10	==	2
11	==	3
100	==	4
101	==	5
110	==	6
111	==	7
1000	==	8

- You can see how when we have a single 1 in a column (ones, two, fours, eights) that it's equivalent to that number in decimal (base 10)

Binary Numbers

- Consider the base 2 number 1001101_2

1: ones (2^0)

0: twos (2^1)

1: fours (2^2)

1: eights (2^3)

0: sixteens (2^4)

0: thirty-twos (2^5)

1: sixty-fours (2^6)

Binary Numbers

- Consider the base 2 number 1001101_2

1: ones (2^0)

0: twos (2^1)

1: fours (2^2)

1: eights (2^3)

0: sixteens (2^4)

0: thirty-twos (2^5)

1: sixty-fours (2^6)

- $1 \times 2^0 + 1 \times 2^2 + 1 \times 2^3 + 1 \times 2^6 = 1 + 4 + 8 + 64 = \mathbf{77}_{10}$ (base specified as a subscript)

Binary <-> Decimal

Binary to Decimal

- Convert 1111_2 to base 10:

- Convert 100010_2 to base 10:

- Convert 0_2 to base 10:

Binary to Decimal

- Convert 1111_2 to base 10:

$$1 \times 2^0 + 1 \times 2^1 + 1 \times 2^2 + 1 \times 2^3 = 1 + 2 + 4 + 8 = 15_{10}$$

- Convert 100010_2 to base 10:

$$1 \times 2^1 + 1 \times 2^5 = 2 + 32 = 34_{10}$$

- Convert 0_2 to base 10:

$$0_{10}$$

The Division Algorithm

- Allows us to convert from Decimal to Binary

Let Q represent the number to convert

Repeat

 Divide Q by 2, recording the Quotient, Q , and the remainder, R

Until Q is 0

Read the remainders from bottom to top

- Divide by the base to which we want to convert (algorithm works for conversion from decimal to **any** base)

Decimal to Binary

- Convert 191_{10} to Binary:

$$191 / 2 = 95, \text{ remainder } 1$$

$$95 / 2 = 47, \text{ remainder } 1$$

$$47 / 2 = 23, \text{ remainder } 1$$

$$23 / 2 = 11, \text{ remainder } 1$$

$$11 / 2 = 5, \text{ remainder } 1$$

$$5 / 2 = 2, \text{ remainder } 1$$

$$2 / 2 = 1, \text{ remainder } 0$$

$$1 / 2 = 0, \text{ remainder } 1$$

Decimal to Binary

- Convert 191_{10} to Binary:

$$191 / 2 = 95, \text{ remainder } 1$$

$$95 / 2 = 47, \text{ remainder } 1$$

$$47 / 2 = 23, \text{ remainder } 1$$

$$23 / 2 = 11, \text{ remainder } 1$$

$$11 / 2 = 5, \text{ remainder } 1$$

$$5 / 2 = 2, \text{ remainder } 1$$

$$2 / 2 = 1, \text{ remainder } 0$$

$$1 / 2 = 0, \text{ remainder } 1$$

- Reading from bottom to top: $1011\ 1111_2$

- **Check:** $1 + 2^1 + 2^2 + 2^3 + 2^4 + 2^5 + 2^7 = 1 + 2 + 4 + 8 + 16 + 32 + 128 = 191_{10}$

Integer Data

Integer Data

- Base 10 integers can be represented using sequences of bits
 - Common sizes:
 - 8 bits (referred to as a **byte**)
 - 32 bits (referred to as a **word**)
 - 64 bits (referred to as a **double word / long**)
 - 16 bits (referred to as a **half word / short**)
 - N bits of data, each bit stores 2 things
 - $2 * 2 * 2 * \dots * 2$ (N times)
 - 2^N different things can be represented by N bits (generally numbers 0 to $2^N - 1$)

Integer Data

- Base 10 integers can be represented using sequences of bits
- **Byte** [8 bits]: 0000 0000 – 1111 1111 (0 to $2^8 - 1$)
- **Word** [32 bits]: 0 to $2^{32} - 1$
- **Double word (long)** [64 bits]: 0 to $2^{64} - 1$
- **Half word (short)** [16 bits]; 0 to $2^{16} - 1$

Negative Numbers

- Simple idea is called “Signed Magnitude”.
- Idea (SM byte): right-most 7 bits represent the magnitude, first **8th bit represents the sign.**

- Example:

$$65_{10} = 100\ 0001_2$$

+65 as a byte: 0100 0001

-65 as a SM byte: 1100 0001

Negative Numbers

- Simple idea is called “Signed Magnitude”.
- Idea (SM byte): right-most 7 bits represent the magnitude, first **8th bit represents the sign.**

- Example:

$$65_{10} = 100\ 0001_2$$

+65 as a byte: 0100 0001

-65 as a SM byte: 1100 0001

Losing 8th bit means we can only represent half as many positive numbers. We gain most back as negative numbers but...

what is 1000 0000? -0?

Other Bases

Other Bases

- A number system can have any base
 - **Decimal: Base 10 (0,1,2,3,4,5,6,7,8,9)**
 - **Binary: Base 2 (0,1)**
 - Octal: Base 8 (0,1,2,3,4,5,6,7)
 - **Hexadecimal: Base 16 (0,1,2,3,4,5,6,7,8,9,a,b,c,d,e,f)**
 - Vigesimal: Base 20 (0,1,2,3,4,5,6,7,8,9,a,b,c,d,e,f,g,h,i,j)
 - Base 6 (0,1,2,3,4,5)
 - Any other number we choose...

Hexadecimal

- Convert 0xA1 to decimal:

- Convert 44 base 16 to decimal:

- Convert CAFE_{16} to base 10:

Hexadecimal

- Convert 0xA1 to decimal:

$$\mathbf{A \times 16^1 + 1 \times 16^0 =}$$

$$10 \times 16^1 + 1 \times 16^0 =$$

$$160 + 1 =$$

$$161_{10}$$

- Convert 44 base 16 to decimal:

$$\mathbf{4 \times 16^1 + 4 \times 16^0 =}$$

$$64 + 4 =$$

$$68_{10}$$

- Convert CAFE₁₆ to base 10:

$$\mathbf{C \times 16^3 + A \times 16^2 + F \times 16^1 + E \times 16^0 =}$$

$$12 \times 16^3 + 10 \times 16^2 + 15 \times 16^1 + 14 \times 16^0 =$$

$$12 \times 4096 + 10 \times 256 + 15 \times 16 + 14 \times 1 =$$

$$51966_{10}$$

Hexadecimal

- Convert 507_{10} to base 16:
- Use division method with 16 instead of 2:

Hexadecimal

- Convert 507_{10} to base 16:
- Use division method with 16 instead of 2:

$$507/16 = 31, \text{ remainder } 11 = \text{B}$$

$$31/16 = 1, \text{ remainder } 15 = \text{F}$$

$$1/16 = 0, \text{ remainder } 1$$

Hexadecimal

- Convert 507_{10} to base 16:
- Use division method with 16 instead of 2:

$$507/16 = 31, \text{ remainder } 11 = B$$

$$31/16 = 1, \text{ remainder } 15 = F$$

$$1/16 = 0, \text{ remainder } 1$$

- Reading from bottom to top: $1FB_{16}$

- **Check your work:**

$$1 \times 16^2 + F \times 16^1 + B \times 16^0 = 1 \times 16^2 + 15 \times 16^1 + 11 \times 16^0 = 256 + 240 + 11 = 507_{10}$$

Utility of Hexadecimal

- Common to have groups of 32 bits
 - 32 bits is cumbersome to write
 - easy to make mistakes
- Use hexadecimal as a shorthand
 - 8 hex digits instead of 32 bits
 - Group bits from the right
 - Memorize mapping from binary to hex for values between 0 and F

Utility of Hexadecimal

Convert 0xF51A to binary

Convert 1001001010101011010100 from binary to hex

Utility of Hexadecimal

Convert 0xF51A to binary

F=1111₂, 5 = 0101₂, 1 =0001₂, A=1010₂

1111 0101 0001 1010₂

Convert 1001001010101011010100 from binary to hex

10 0100 1010 1010 1101 0100

0010=2 0100=4 1010=10 1010=10 1101=13 0100=4

0010=2 0100=4 1010=a 1010=a 1101=d 0100=4

0x24aad4

Character Data

Representing Characters

- **Standard encoding scheme called ASCII**
 - **American Standard Code for Information Interchange**
 - **7 bits per character** ($2^7 = 128$ possible characters)
 - Includes printable characters
 - Includes “control characters” that impact formatting (tab, newline), data transmission (mostly obsolete)
 - **Layout seems arbitrary, but actually contains some interesting patterns**


Dec Bin	Hex Char	Dec Bin	Hex Char	Dec Bin	Hex Char	Dec Bin	Hex Char
0	0000 0000 00 [NUL]	32	0010 0000 20 space	64	0100 0000 40 @	96	0110 0000 60 `
1	0000 0001 01 [SOH]	33	0010 0001 21 !	65	0100 0001 41 A	97	0110 0001 61 a
2	0000 0010 02 [STX]	34	0010 0010 22 "	66	0100 0010 42 B	98	0110 0010 62 b
3	0000 0011 03 [ETX]	35	0010 0011 23 #	67	0100 0011 43 C	99	0110 0011 63 c
4	0000 0100 04 [EOT]	36	0010 0100 24 \$	68	0100 0100 44 D	100	0110 0100 64 d
5	0000 0101 05 [ENQ]	37	0010 0101 25 %	69	0100 0101 45 E	101	0110 0101 65 e
6	0000 0110 06 [ACK]	38	0010 0110 26 &	70	0100 0110 46 F	102	0110 0110 66 f
7	0000 0111 07 [BEL]	39	0010 0111 27 '	71	0100 0111 47 G	103	0110 0111 67 g
8	0000 1000 08 [BS]	40	0010 1000 28 (72	0100 1000 48 H	104	0110 1000 68 h
9	0000 1001 09 [TAB]	41	0010 1001 29)	73	0100 1001 49 I	105	0110 1001 69 i
10	0000 1010 0A [LF]	42	0010 1010 2A *	74	0100 1010 4A J	106	0110 1010 6A j
11	0000 1011 0B [VT]	43	0010 1011 2B +	75	0100 1011 4B K	107	0110 1011 6B k
12	0000 1100 0C [FF]	44	0010 1100 2C ,	76	0100 1100 4C L	108	0110 1100 6C l
13	0000 1101 0D [CR]	45	0010 1101 2D -	77	0100 1101 4D M	109	0110 1101 6D m
14	0000 1110 0E [SO]	46	0010 1110 2E .	78	0100 1110 4E N	110	0110 1110 6E n
15	0000 1111 0F [SI]	47	0010 1111 2F /	79	0100 1111 4F O	111	0110 1111 6F o
16	0001 0000 10 [DLE]	48	0011 0000 30 0	80	0101 0000 50 P	112	0111 0000 70 p
17	0001 0001 11 [DC1]	49	0011 0001 31 1	81	0101 0001 51 Q	113	0111 0001 71 q
18	0001 0010 12 [DC2]	50	0011 0010 32 2	82	0101 0010 52 R	114	0111 0010 72 r
19	0001 0011 13 [DC3]	51	0011 0011 33 3	83	0101 0011 53 S	115	0111 0011 73 s
20	0001 0100 14 [DC4]	52	0011 0100 34 4	84	0101 0100 54 T	116	0111 0100 74 t
21	0001 0101 15 [NAK]	53	0011 0101 35 5	85	0101 0101 55 U	117	0111 0101 75 u
22	0001 0110 16 [SYN]	54	0011 0110 36 6	86	0101 0110 56 V	118	0111 0110 76 v
23	0001 0111 17 [ETB]	55	0011 0111 37 7	87	0101 0111 57 W	119	0111 0111 77 w
24	0001 1000 18 [CAN]	56	0011 1000 38 8	88	0101 1000 58 X	120	0111 1000 78 x
25	0001 1001 19 [EM]	57	0011 1001 39 9	89	0101 1001 59 Y	121	0111 1001 79 y
26	0001 1010 1A [SUB]	58	0011 1010 3A :	90	0101 1010 5A Z	122	0111 1010 7A z
27	0001 1011 1B [ESC]	59	0011 1011 3B ;	91	0101 1011 5B [123	0111 1011 7B {
28	0001 1100 1C [FS]	60	0011 1100 3C <	92	0101 1100 5C \	124	0111 1100 7C
29	0001 1101 1D [GS]	61	0011 1101 3D =	93	0101 1101 5D]	125	0111 1101 7D }
30	0001 1110 1E [RS]	62	0011 1110 3E >	94	0101 1110 5E ^	126	0111 1110 7E ~
31	0001 1111 1F [US]	63	0011 1111 3F ?	95	0101 1111 5F _	127	0111 1111 7F [DEL]

Representing More Characters

- Limitation of ASCII?
 - Only supports Latin character set
 - No support for accents, additional character sets
 - Solutions?

Representing More Characters

- **UTF-8**
 - Another encoding scheme for characters
 - **Variable length – 1, 2, 3 or 4 bytes per character**
 - **Compatible with ASCII**
 - Consider each byte
 - **Left most bit is 0? Usual ASCII Character**
 - Left most bits are 110? 2 byte character
 - Left most bits are 1110? 3 byte character
 - Left most bits are 11110? 4 byte character
 - `\xF0\x9F\x98\x82` → tears of joy
 - (`\x` indicates hexadecimal bytes here)

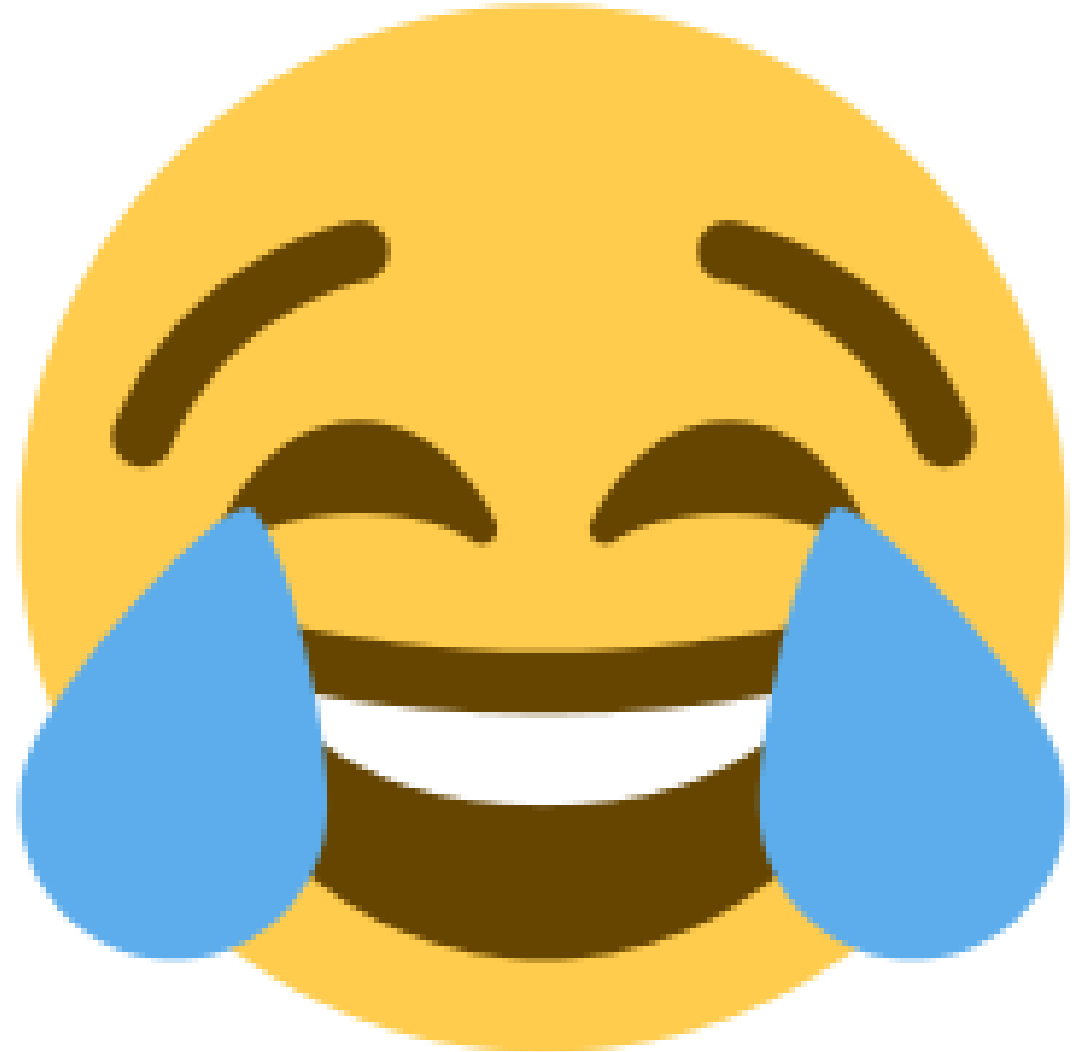

UTF-8


Number of bytes	Bits for code point	First code point	Last code point	Byte 1	Byte 2	Byte 3	Byte 4
1	7	U+0000	U+007F	0xxxxxxx			
2	11	U+0080	U+07FF	110xxxxx	10xxxxxx		
3	16	U+0800	U+FFFF	1110xxxx	10xxxxxx	10xxxxxx	
4	21	U+10000	U+10FFFF	11110xxx	10xxxxxx	10xxxxxx	10xxxxxx

Decimal Point Numbers

Representing Real Numbers

- Standard Representation: IEEE 754 Floating Point
 - Express the number in scientific notation
 - **-0.0002589 becomes $-2.589 * 10^{-4}$**
- Need to store **sign**, **exponent**, and **mantissa** (the fraction)
- 32-bit floating point representation:
 - **sign (1 bit), exponent (8 bits), mantissa (23 bits)**
- 64-bits:
 - sign (1 bit), exponent (11 bits), mantissa (52 bits)

IEEE 754 – 32 Bit

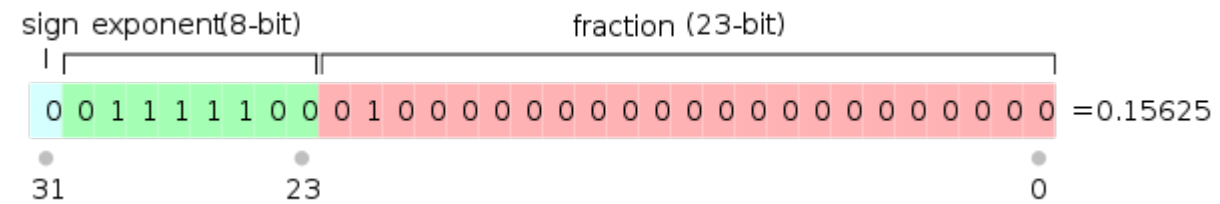

[This Photo](#) by Unknown Author is licensed under [CC BY-SA](#)

Problems with Real Numbers

- How many real numbers are there? **Infinity**
- How many real numbers are there between 0 and 1? **Infinity**
- How many values can be represented by 32 or 64 bits?
- **$2^{32} = 4.2$ billion,**
- **$2^{64} = 1.8 \times 10^{19}$**
- **Largest values: $2^{32} - 1$ and $2^{64} - 1$**
- What's the problem?

Problems with Real Numbers

- Problem: some real numbers exist that cannot be represented exactly in floating point
- (eg. $1/3 = 0.3333333\dots$, $\text{sqrt}(2) = 1.414213\dots$).
- Thus floating point numbers only **approximate** real numbers (and maintaining accuracy is a very important concern!).

Image Data

Encoding Images

- Common Techniques
 - **Vector Images**
 - Vector images: “line work” Image is encoded as a collection of geometric primitives such as points, lines, curves.
 - **Raster Images**
 - Raster images: constructed from a grid of pixels (picture elements), where each picture is assigned a color

Representing Colors

- How do we represent a color as a sequence of bits?
- Can represent almost any color as a combination of some red, some green, and some blue. Typically use a scale from 0 (no light of that color) to 255 (full on for that color). Yields $256 \times 256 \times 256 = 16$ million different possible colors.
 - (256 = $16 * 16$ or two hex symbols)
- To represent an image: 3 color components for **each pixel** (becomes a lot of bytes very quickly!)

Videos

- Raster image storage formats like jpg heavily use ‘compression’ to reduce storage size
 - Basic ideas, reduce quantity of colours stored, and group idea of ‘where colours are’ to store less information
- Video compression works similar but since video is a sequence of frames where each frame is an image, they also make use of reducing data by grouping idea of ‘colours stay the same and where’ across multiple frames
 - Great example of compression failure → confetti
 - When confetti is in image, the colour of spot changes every frame and nearby spots are different each frame
 - This means more info is needed per frame, as a result at the same data rate, the image quality will go down (boxy artifacts will appear, or even decoding breaks down)
 - This is the same reasons sports struggle with compressed video

Onward to ... decisions.

Jonathan Hudson
jwhudson@ucalgary.ca
<https://pages.cpsc.ucalgary.ca/~hudsonj/>

