

# Chapter 5

## Network Layer:

### The Control Plane


#### A note on the use of these Powerpoint slides:

We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a *lot* of work on our part. In return for use, we only ask the following:

- If you use these slides (e.g., in a class) that you mention their source (after all, we'd like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

Thanks and enjoy! JFK/KWR

© All material copyright 1996-2016  
J.F Kurose and K.W. Ross, All Rights Reserved

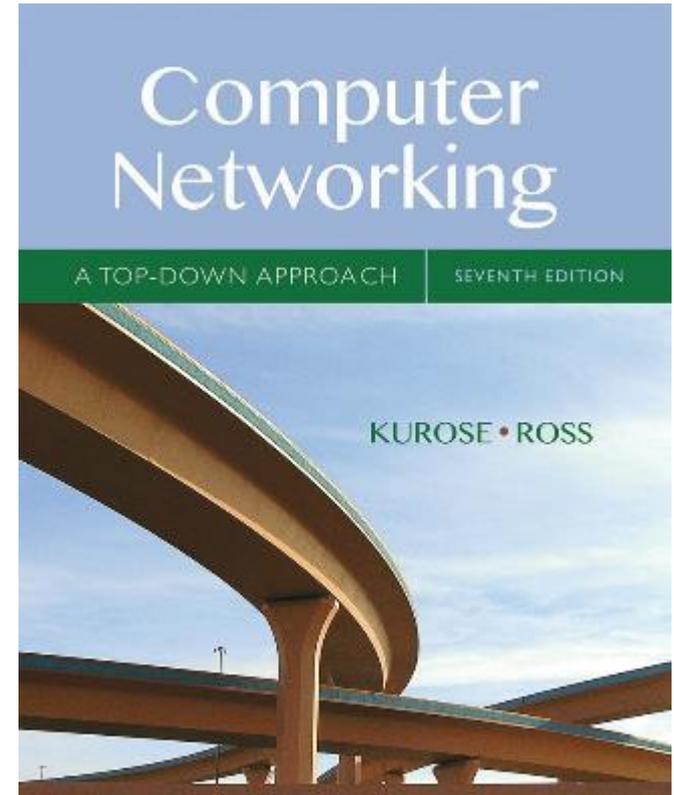

## *Computer Networking: A Top Down Approach*

7<sup>th</sup> edition

Jim Kurose, Keith Ross

Pearson/Addison Wesley

April 2016

# Chapter 5: outline

5.1 introduction

5.2 routing protocols

- link state
- distance vector

5.3 intra-AS routing in the Internet: OSPF

5.4 routing among the ISPs: BGP

5.5 The SDN control plane

5.6 ICMP: The Internet Control Message Protocol


5.7 Network management and SNMP

# Software defined networking (SDN)

- Internet network layer: historically has been implemented via distributed, per-router approach
  - *monolithic* router contains switching hardware, runs proprietary implementation of Internet standard protocols (IP, RIP, IS-IS, OSPF, BGP) in proprietary router OS (e.g., Cisco IOS)
  - different “middleboxes” for different network layer functions: firewalls, load balancers, NAT boxes, ..
- ~2005: renewed interest in rethinking network control plane


# Recall: per-router control plane

Individual routing algorithm components *in each and every router* interact with each other in control plane to compute forwarding tables

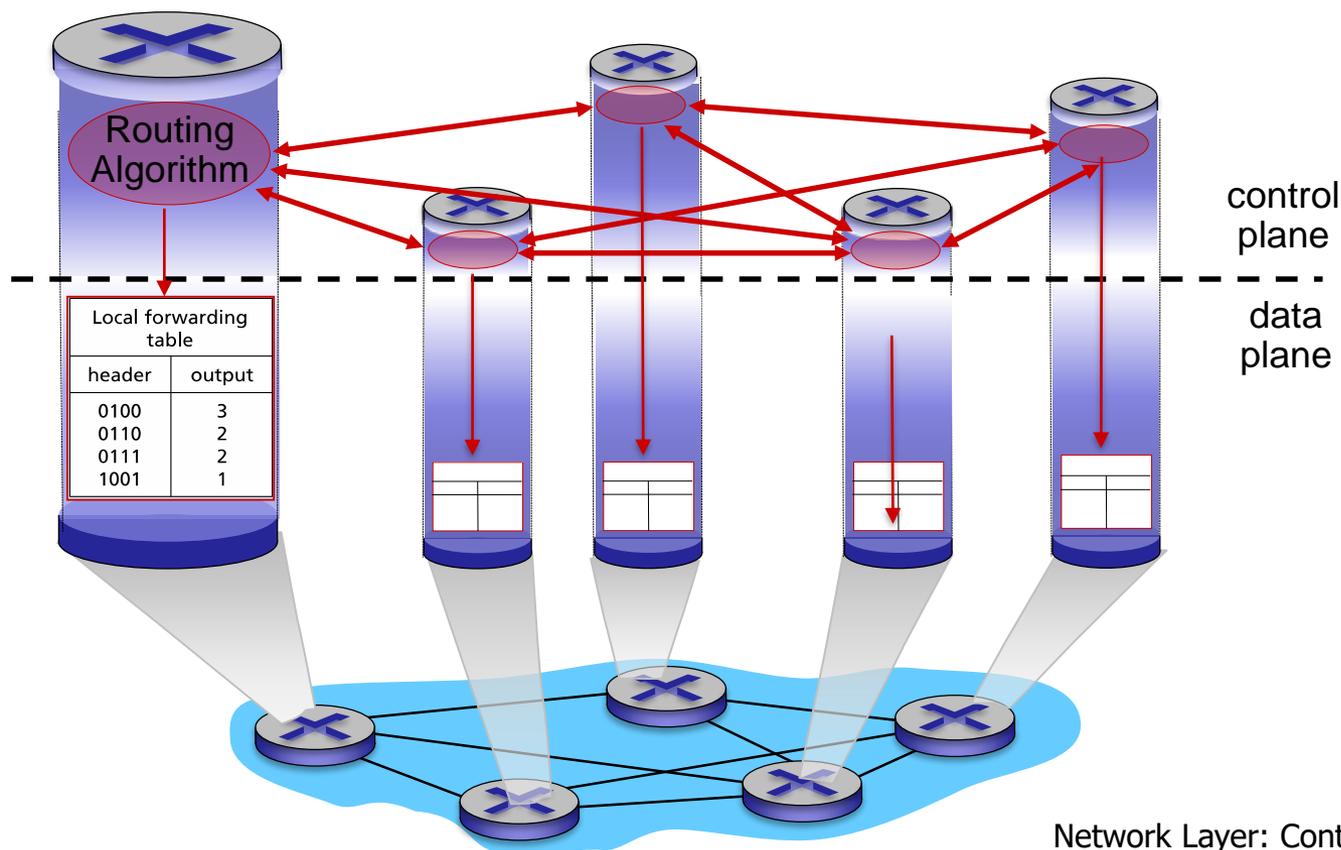

# Recall: logically centralized control plane

A distinct (typically remote) controller interacts with local control agents (CAs) in routers to compute forwarding tables

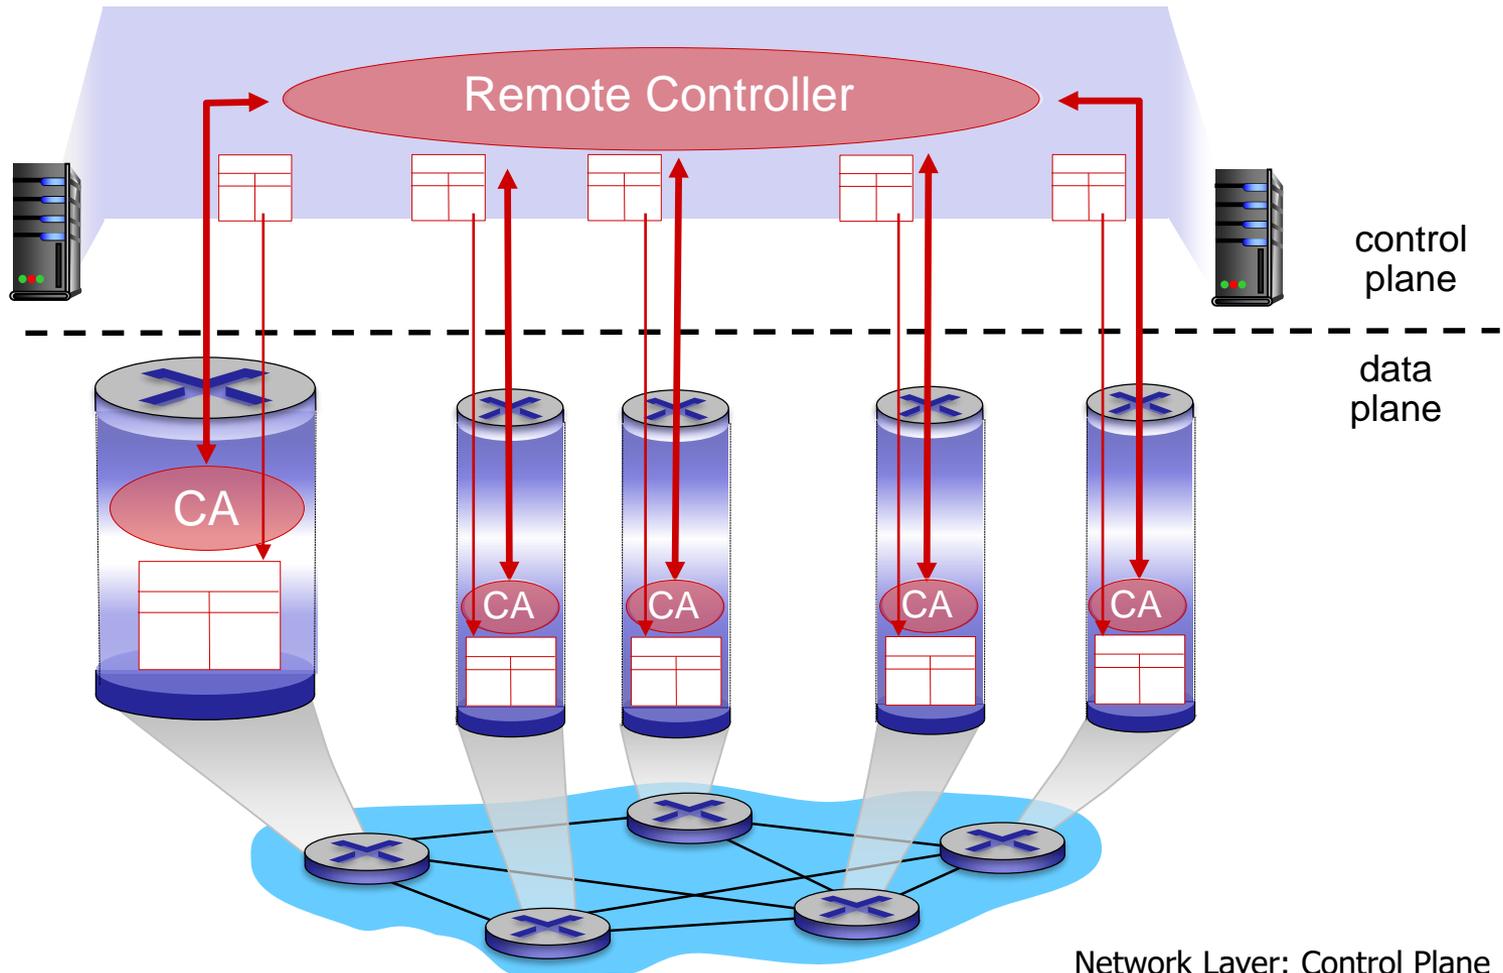

# Software defined networking (SDN)




*Why* a *logically centralized* control plane?

- easier network management: avoid router misconfigurations, greater flexibility of traffic flows
- table-based forwarding (OpenFlow API) allows “programming” routers
  - centralized “programming” easier: compute tables centrally and distribute
  - distributed “programming” more difficult: compute tables as result of distributed algorithm (protocol) implemented in each and every router
- open (non-proprietary) implementation of control plane

# Analogy: mainframe to PC evolution\*




Vertically integrated  
Closed, proprietary  
Slow innovation  
Small industry

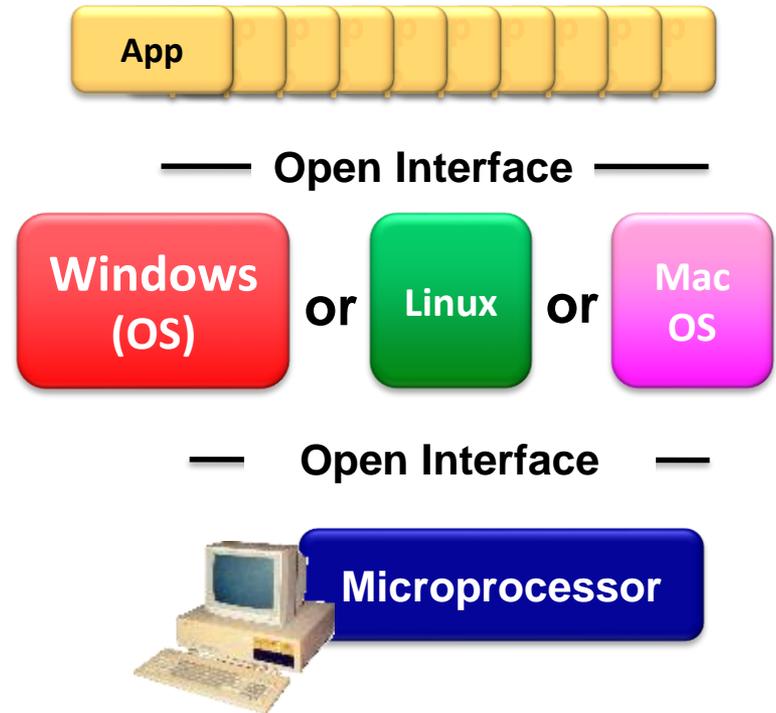

Horizontal  
Open interfaces  
Rapid innovation  
Huge industry

# Traffic engineering: difficult traditional routing

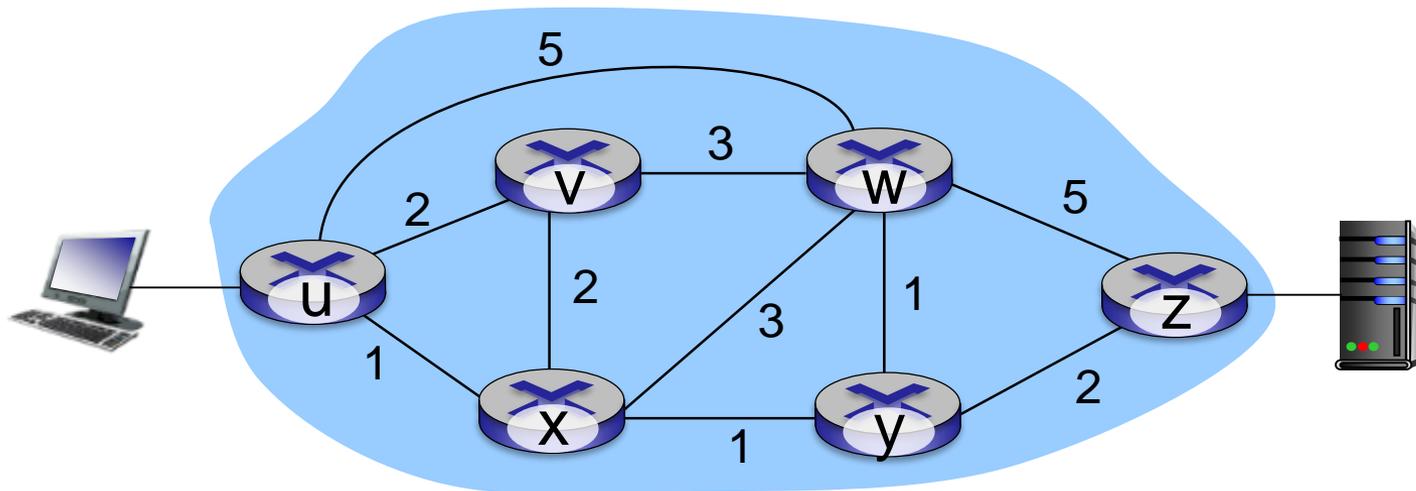

Q: what if network operator wants u-to-z traffic to flow along  $uvwz$ , x-to-z traffic to flow  $xwyz$ ?

A: need to define link weights so traffic routing algorithm computes routes accordingly (or need a new routing algorithm)!

# Software defined networking (SDN)

4. programmable control applications


routing

access control

...

load balance

3. control plane functions external to data-plane switches

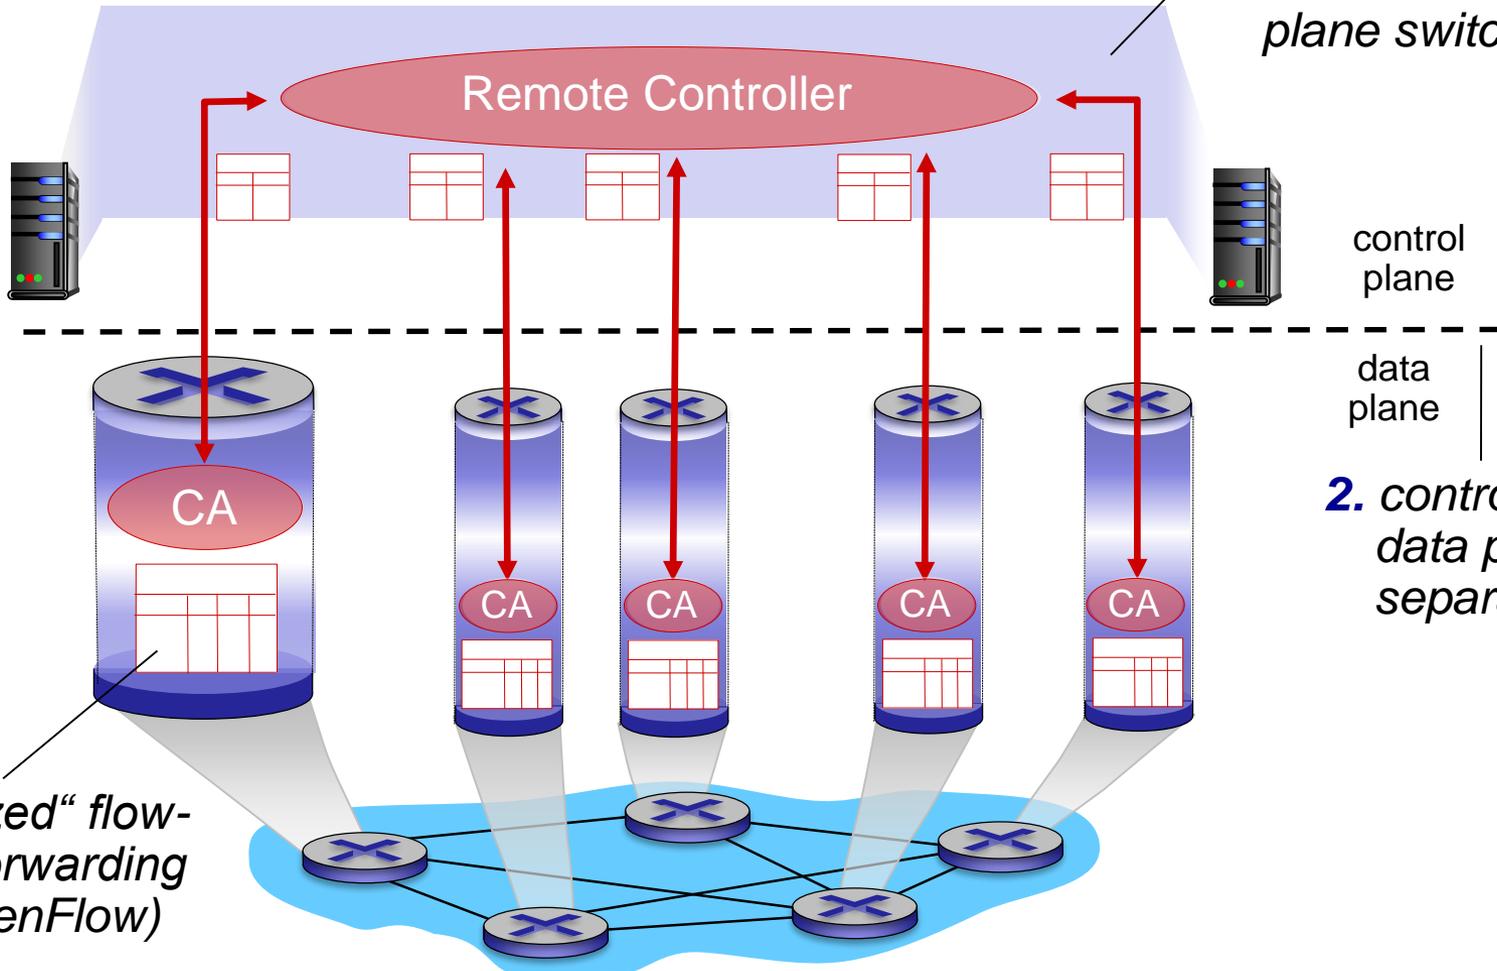

control plane

data plane


2. control, data plane separation

1: generalized "flow-based" forwarding (e.g., OpenFlow)

# SDN perspective: data plane switches

## *Data plane switches*


- fast, simple, commodity switches implementing generalized data-plane forwarding (Section 4.4) in hardware
- switch flow table computed, installed by controller
- API for table-based switch control (e.g., OpenFlow)
  - defines what is controllable and what is not
- protocol for communicating with controller (e.g., OpenFlow)

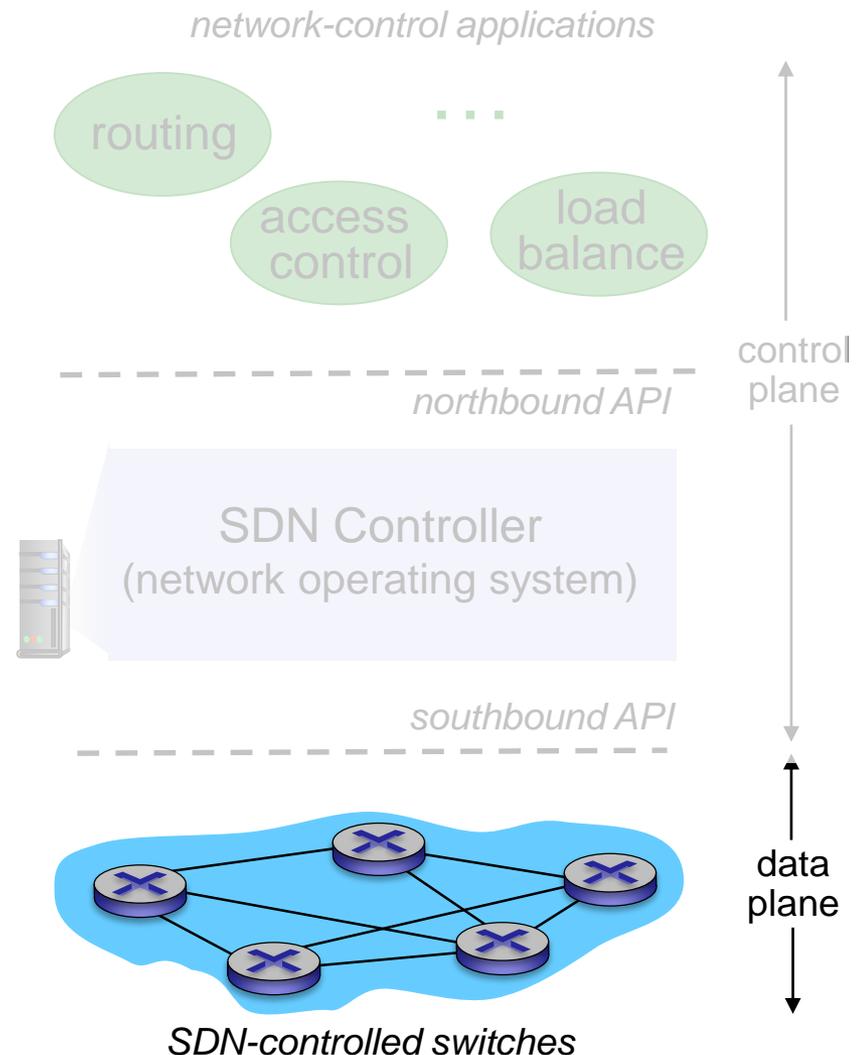

# SDN perspective: SDN controller

## *SDN controller (network OS):*


- maintain network state information
- interacts with network control applications “above” via northbound API
- interacts with network switches “below” via southbound API
- implemented as distributed system for performance, scalability, fault-tolerance, robustness

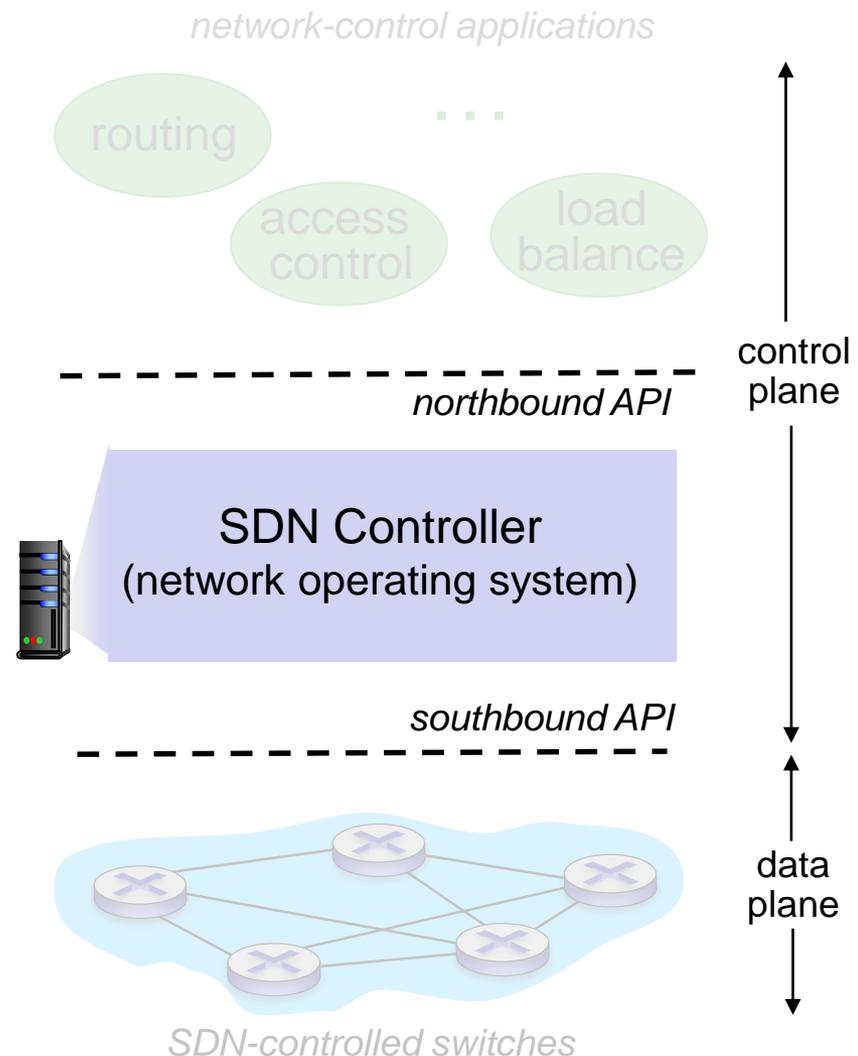

# SDN perspective: control applications

## *network-control apps:*

- “brains” of control: implement control functions using lower-level services, API provided by SDN controller
- *unbundled*: can be provided by 3<sup>rd</sup> party: distinct from routing vendor, or SDN controller

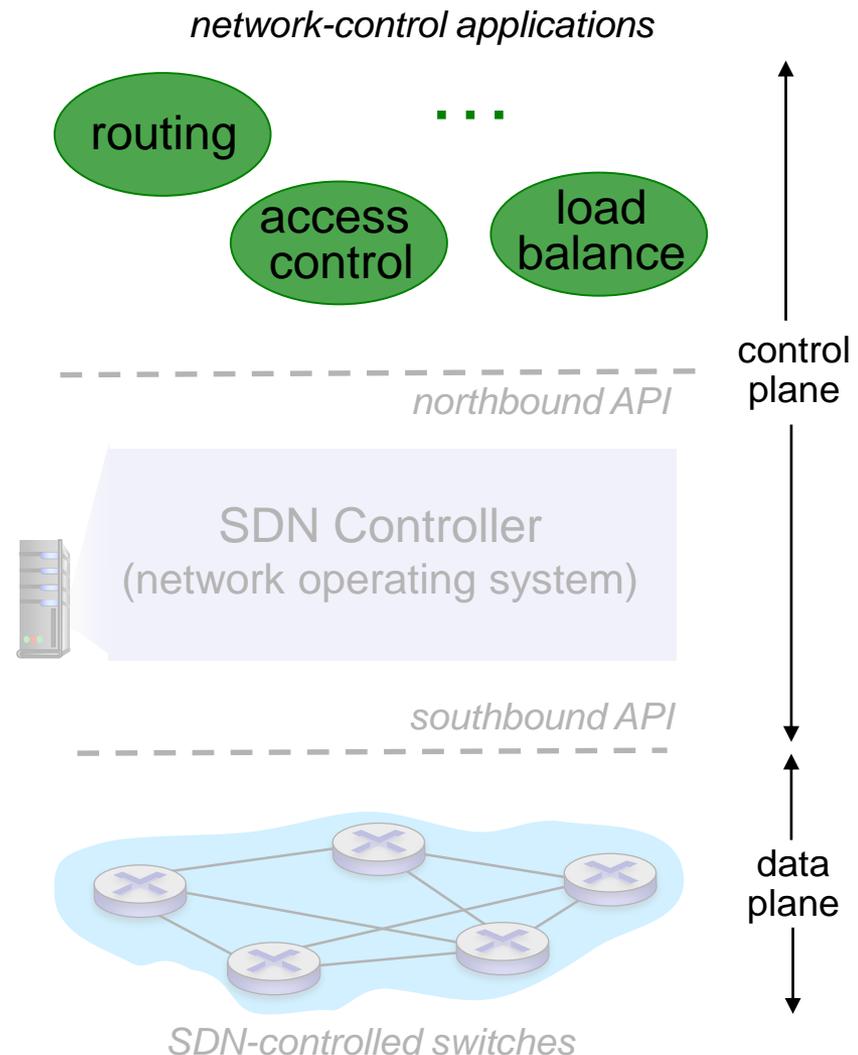


# Components of SDN controller

**Interface layer to network control apps:** abstractions API


**Network-wide state management layer:** state of networks links, switches, services: a *distributed database*

**communication layer:** communicate between SDN controller and controlled switches

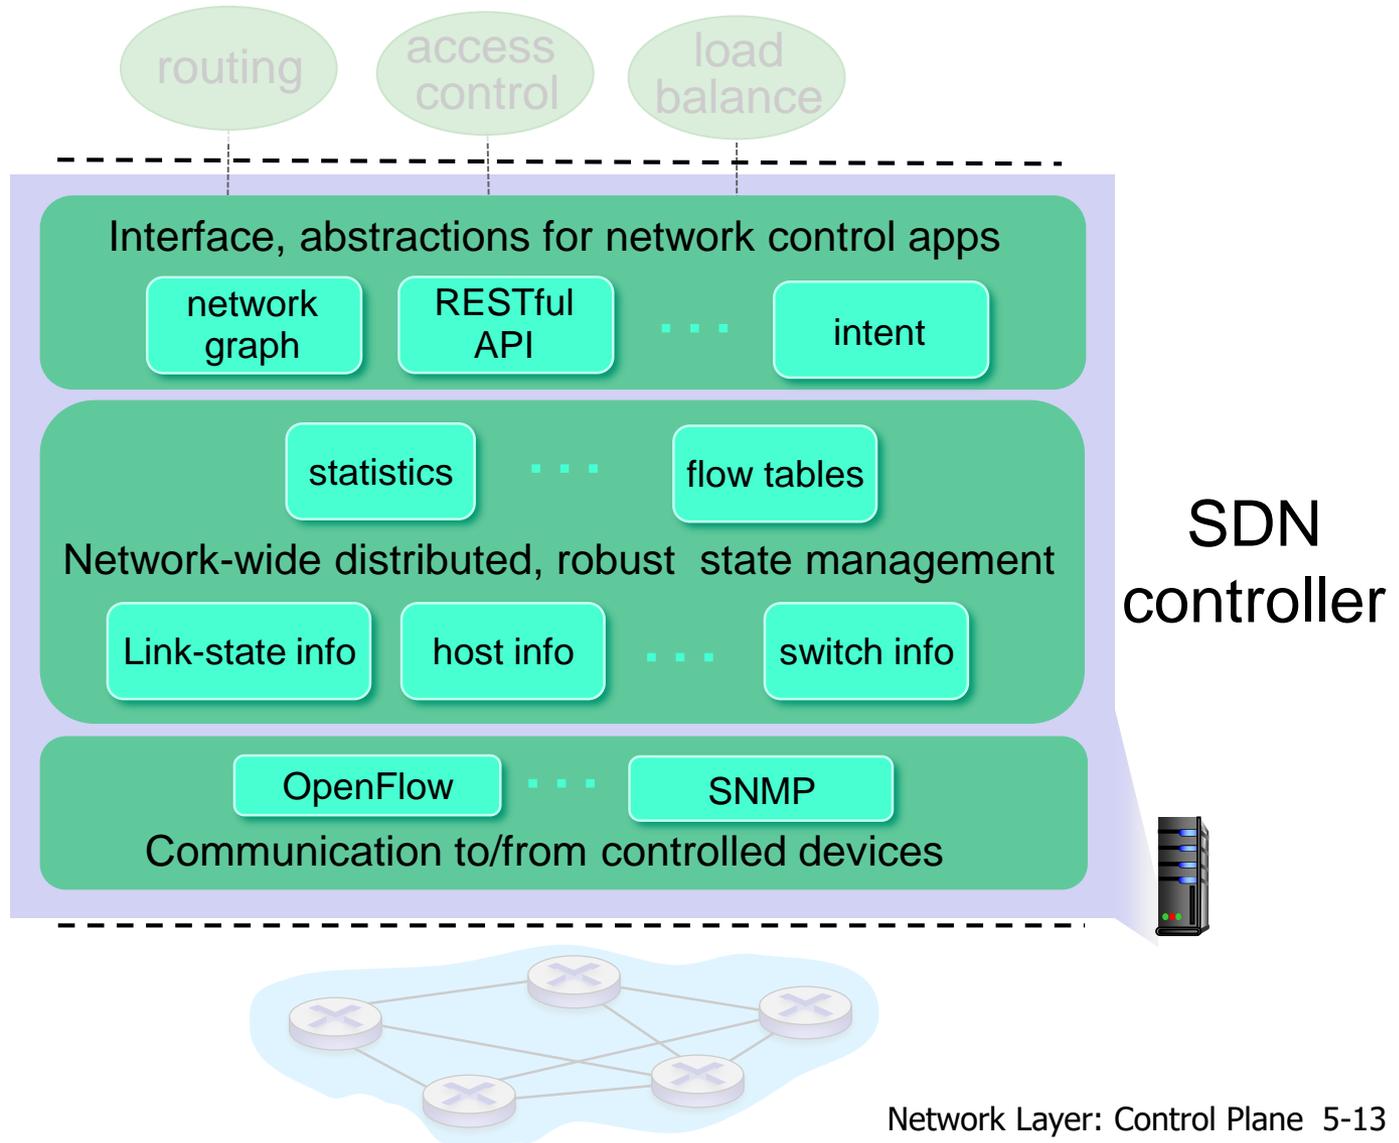

# OpenFlow protocol

OpenFlow Controller

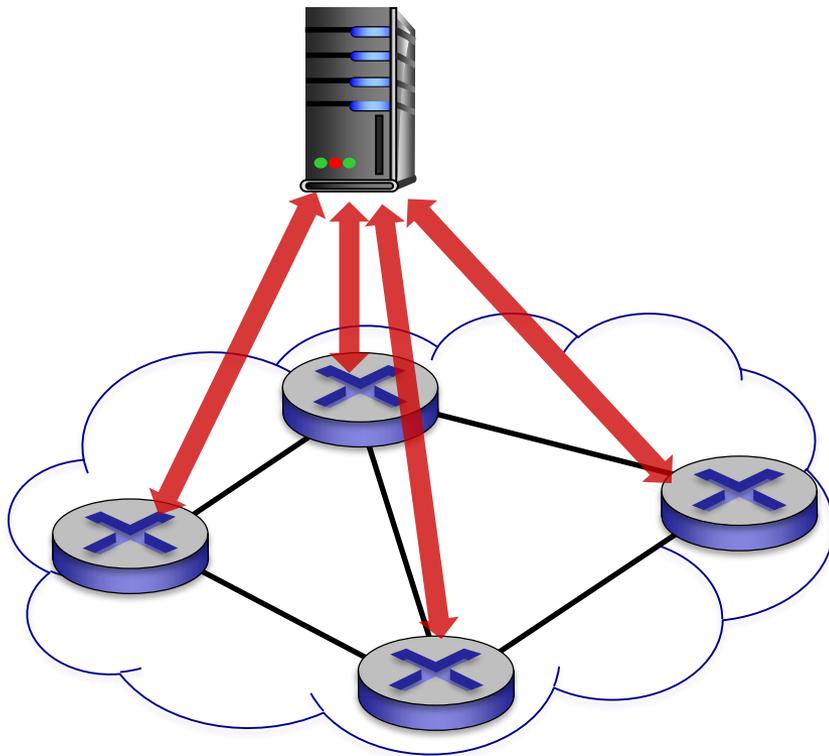


- operates between controller, switch
- TCP used to exchange messages
  - optional encryption
- three classes of OpenFlow messages:
  - controller-to-switch
  - asynchronous (switch to controller)
  - symmetric (misc)

# OpenFlow: controller-to-switch messages

## Key controller-to-switch messages


- **features:** controller queries switch features, switch replies
- **configure:** controller queries/sets switch configuration parameters
- **modify-state:** add, delete, modify flow entries in the OpenFlow tables
- **packet-out:** controller can send this packet out of specific switch port

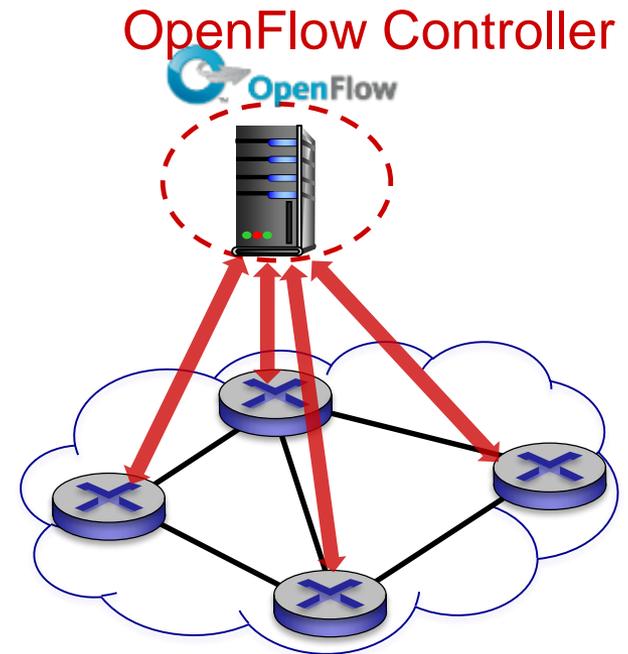


# OpenFlow: switch-to-controller messages

## Key switch-to-controller messages

- *packet-in*: transfer packet (and its control) to controller. See packet-out message from controller
- *flow-removed*: flow table entry deleted at switch
- *port status*: inform controller of a change on a port.

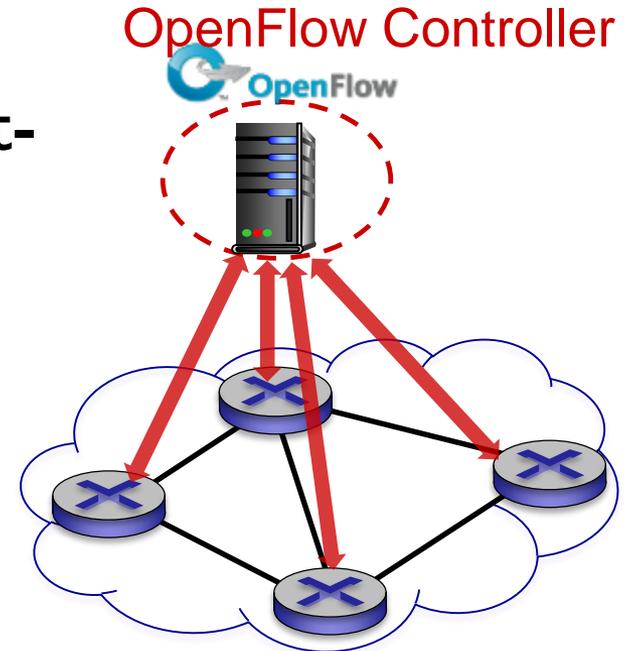


# SDN: control/data plane interaction example

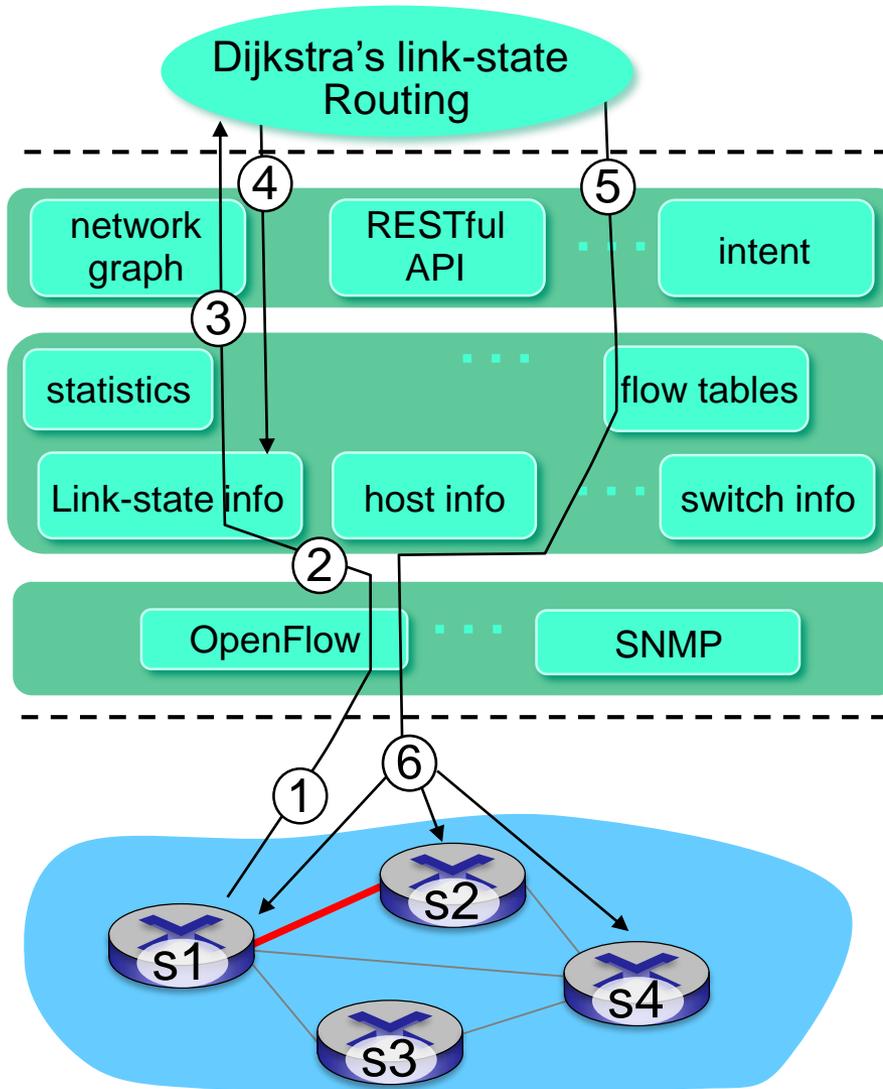


- ① SI, experiencing link failure using OpenFlow port status message to notify controller
- ② SDN controller receives OpenFlow message, updates link status info
- ③ Dijkstra's routing algorithm application has previously registered to be called when ever link status changes. It is called.
- ④ Dijkstra's routing algorithm access network graph info, link state info in controller, computes new routes

# SDN: control/data plane interaction example

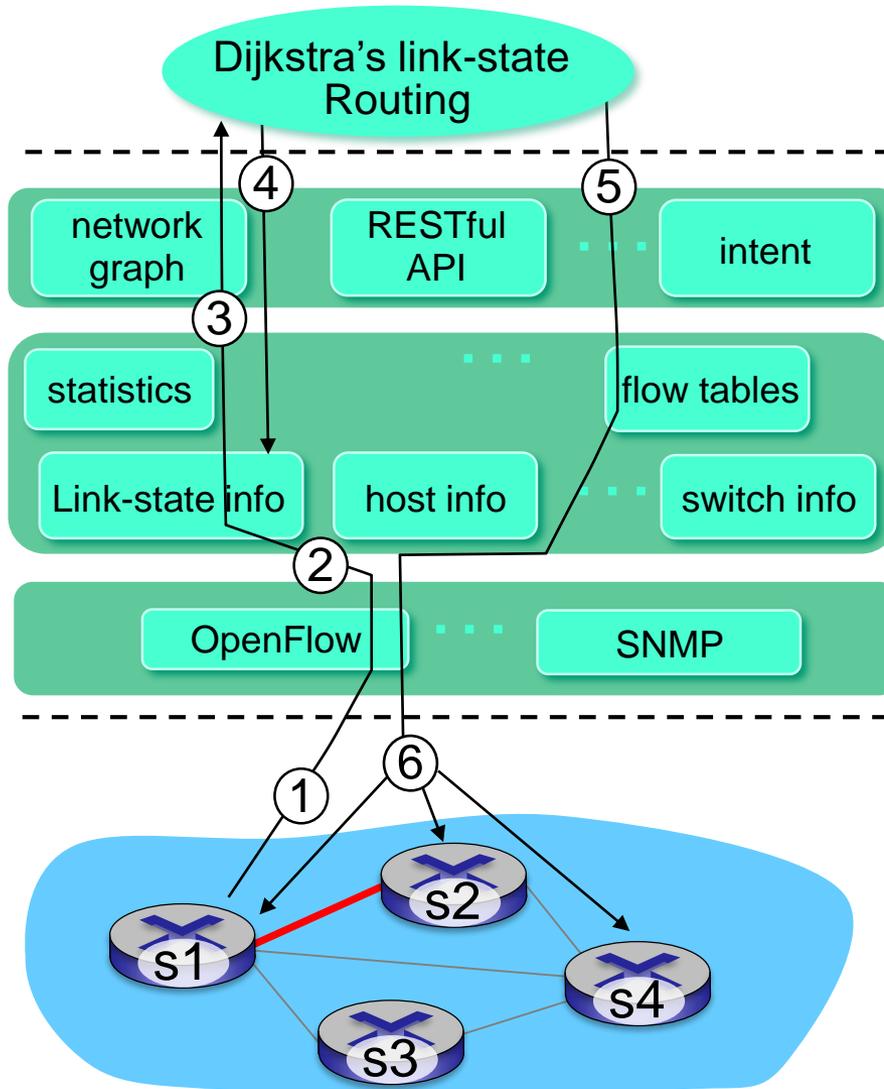


- ⑤ link state routing app interacts with flow-table-computation component in SDN controller, which computes new flow tables needed
- ⑥ Controller uses OpenFlow to install new tables in switches that need updating

# OpenDaylight (ODL) controller

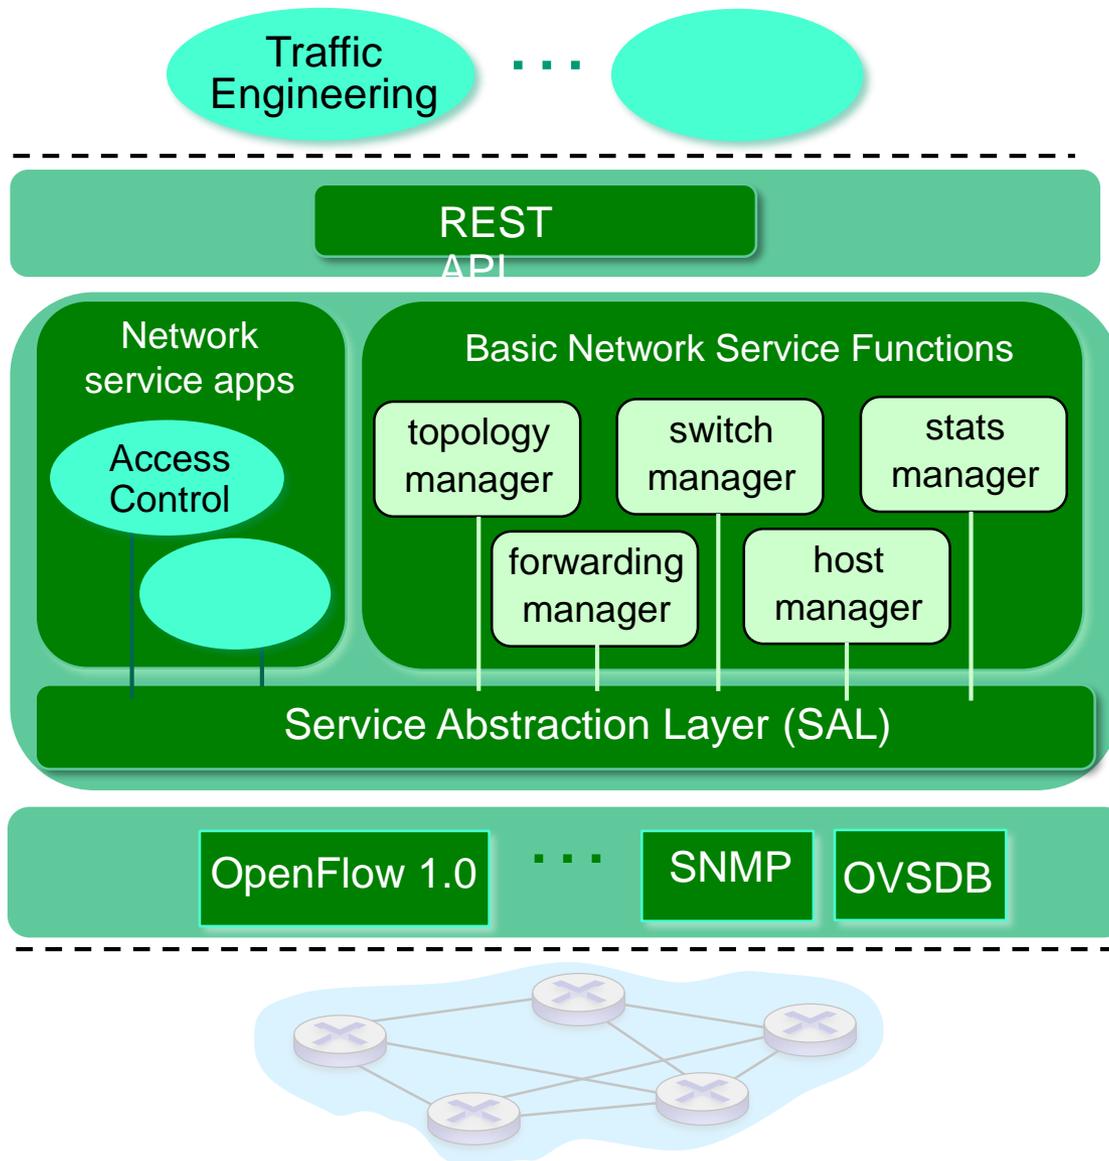

- ODL Lithium controller
- network apps may be contained within, or be external to SDN controller
- Service Abstraction Layer: interconnects internal, external applications and services

# ONOS controller

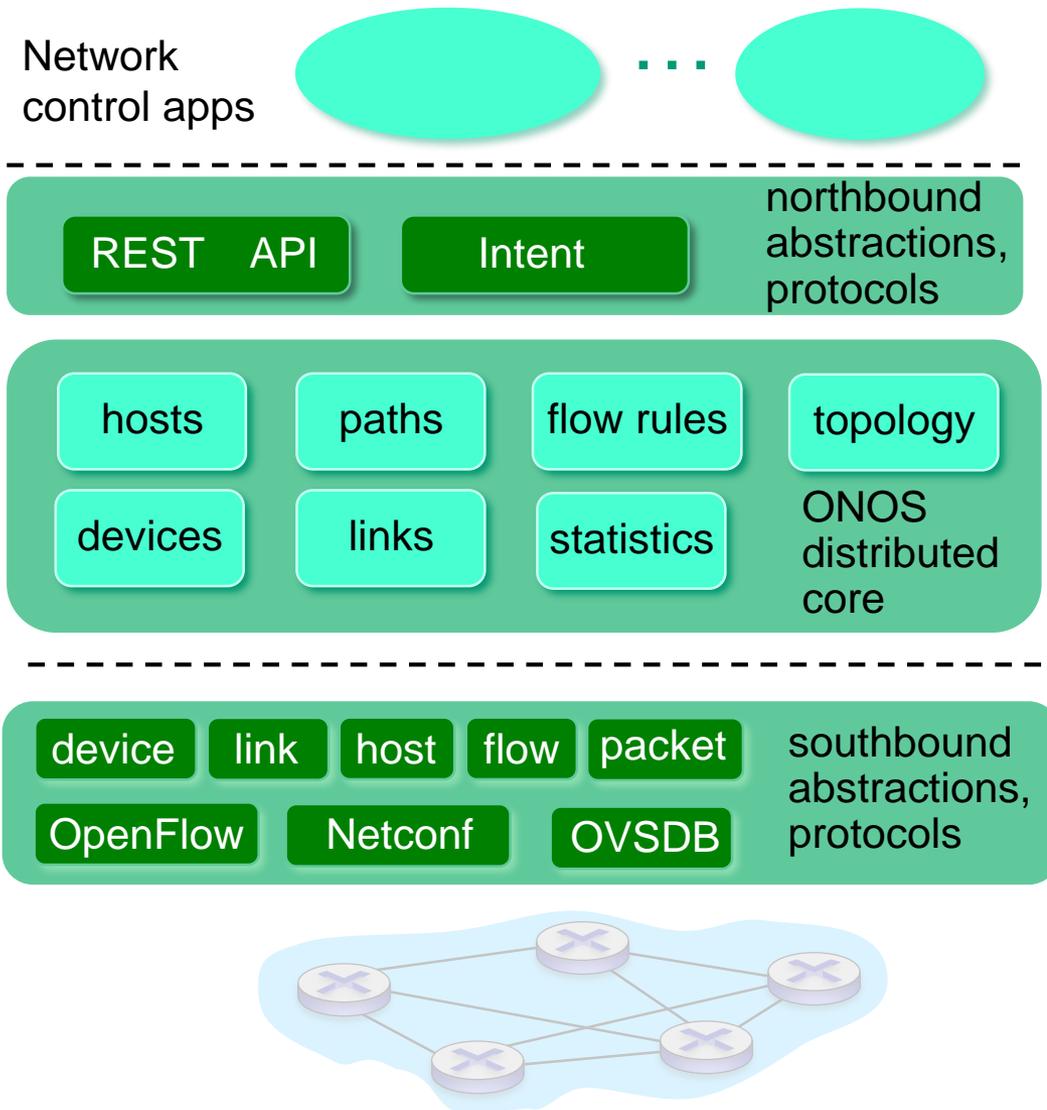

- control apps separate from controller
- intent framework: high-level specification of service: what rather than how
- considerable emphasis on distributed core: service reliability, replication performance scaling

# Chapter 4: outline

## 4.1 Overview of Network layer

- data plane
- control plane

## 4.2 What's inside a router

## 4.3 IP: Internet Protocol


- datagram format
- fragmentation
- IPv4 addressing
- network address translation
- IPv6

## 4.4 Generalized Forward and SDN

- match
- action
- OpenFlow examples of match-plus-action in action


# Generalized Forwarding and SDN

Each router contains a *flow table* that is computed and distributed by a *logically centralized routing controller*

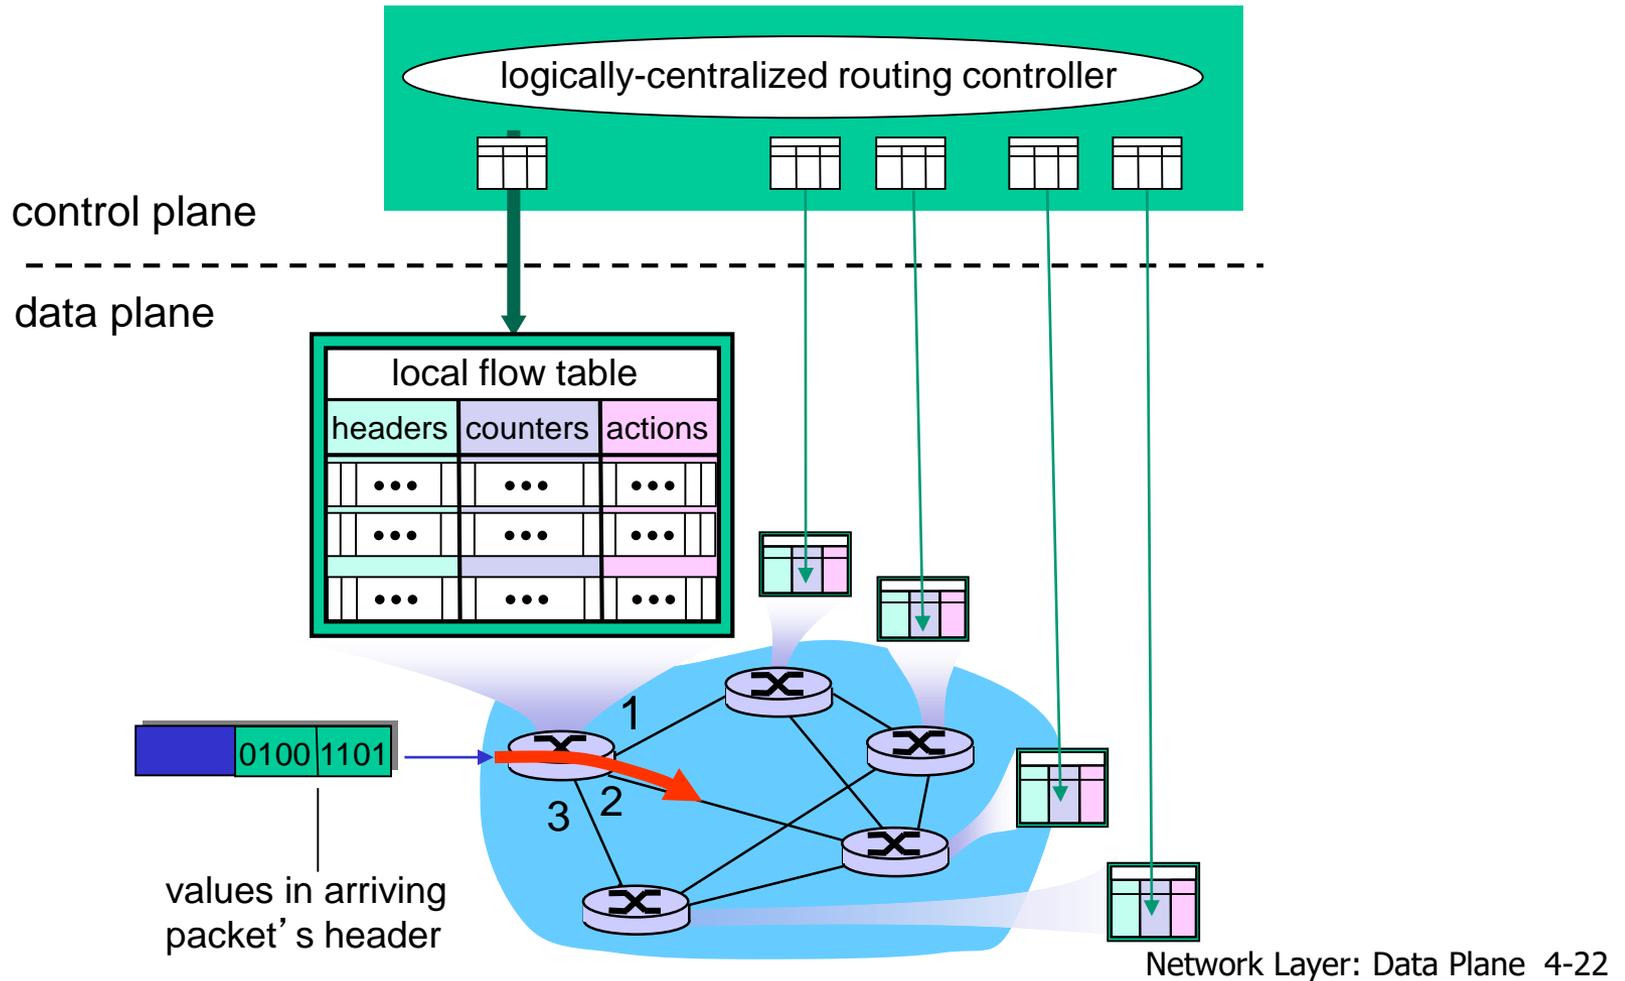

# OpenFlow data plane abstraction


- *flow*: defined by header fields
- generalized forwarding: simple packet-handling rules
  - *Pattern*: match values in packet header fields
  - *Actions: for matched packet*: drop, forward, modify, matched packet or send matched packet to controller
  - *Priority*: disambiguate overlapping patterns
  - *Counters*: #bytes and #packets

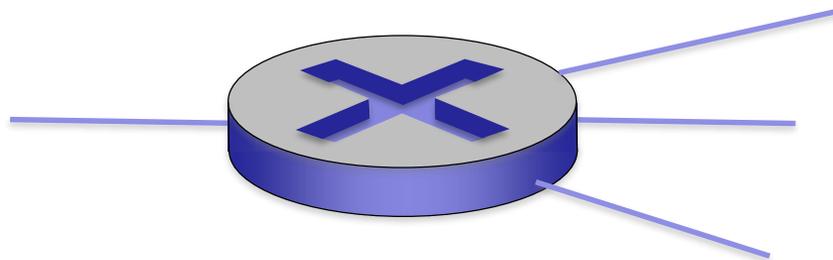

*Flow table in a router (computed and distributed by controller) define router's match+action rules*

# OpenFlow data plane abstraction


- *flow*: defined by header fields
- generalized forwarding: simple packet-handling rules
  - *Pattern*: match values in packet header fields
  - *Actions: for matched packet*: drop, forward, modify, matched packet or send matched packet to controller
  - *Priority*: disambiguate overlapping patterns
  - *Counters*: #bytes and #packets

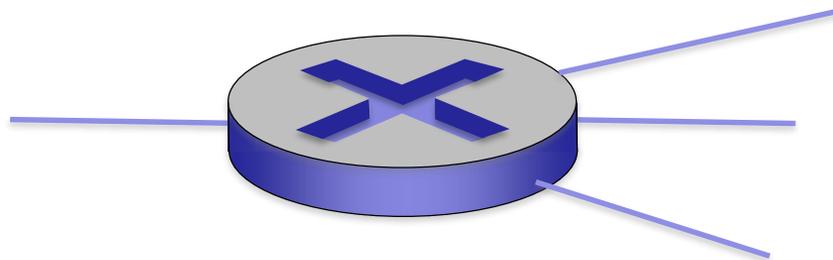

\* : wildcard

1. src=1.2.\*.\* , dest=3.4.5.\* → drop
2. src = \*.\*.\*.\* , dest=3.4.\*.\* → forward(2)
3. src=10.1.2.3, dest=\*.\*.\*.\* → send to controller

# OpenFlow: Flow Table Entries

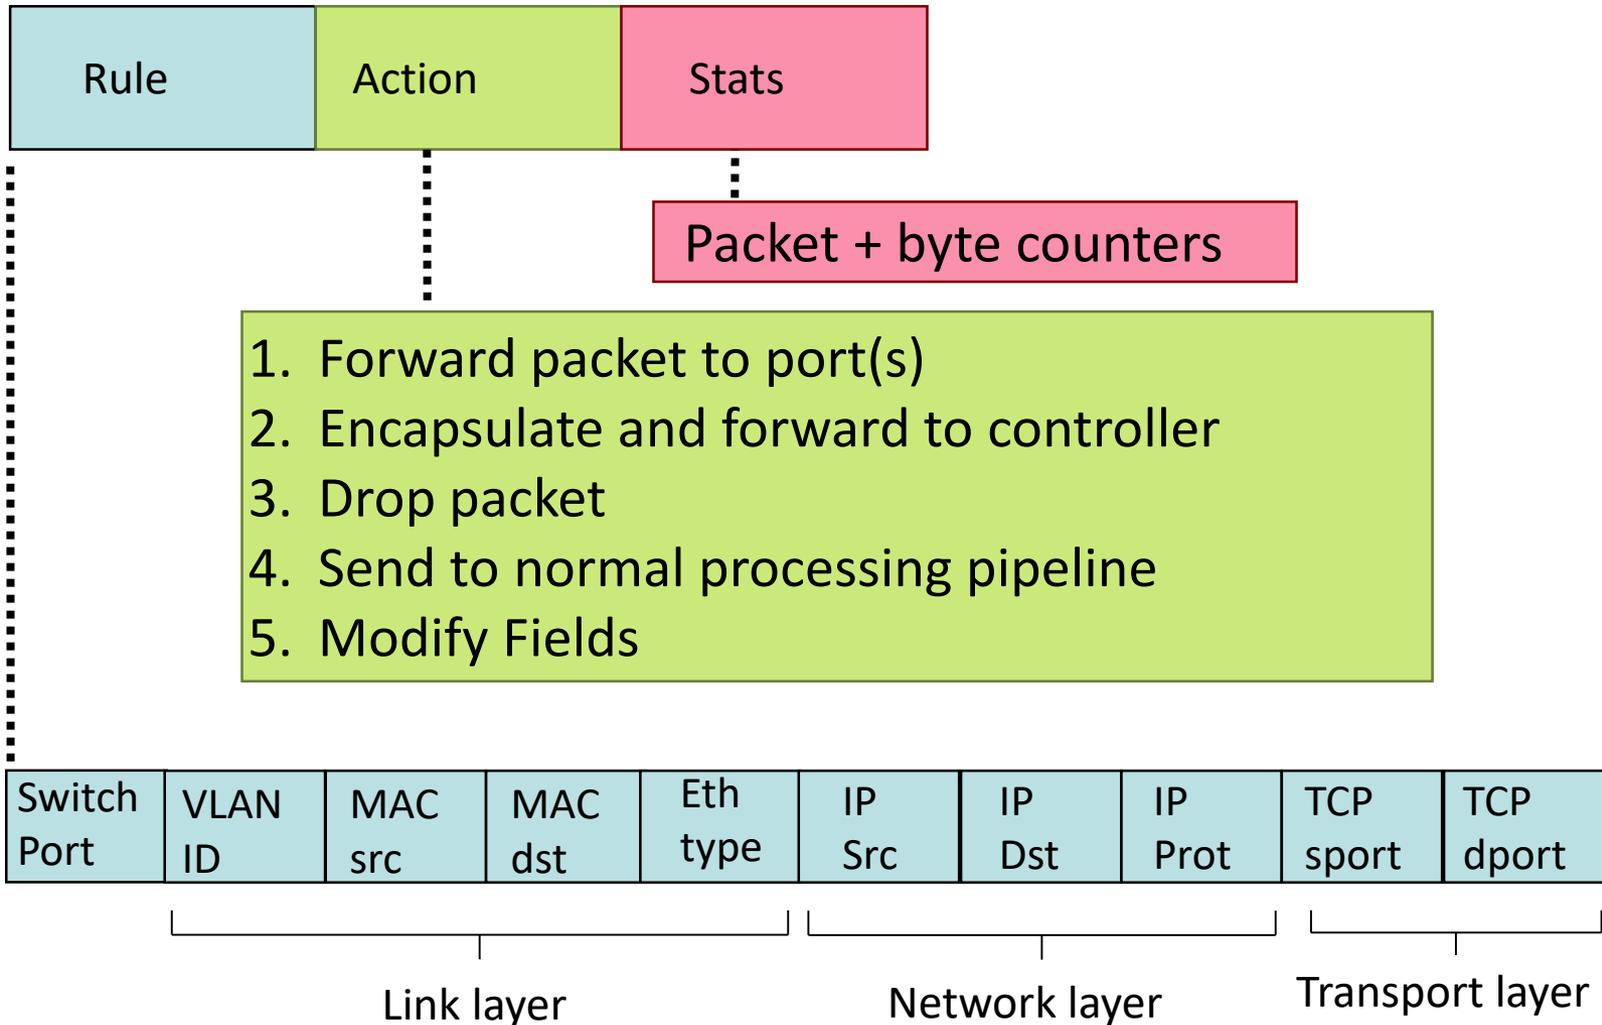

# Examples: Forwarding Functionality

## Destination-based layer 3 (router) forwarding:

Switch Port	MAC src	MAC dst	Eth type	VLAN ID	IP Src	IP Dst	IP Prot	TCP sport	TCP dport	Action
*	*	*	*	*	*	51.6.0.8	*	*	*	port6

*IP datagrams destined to IP address 51.6.0.8 should be forwarded to router output port 6*

## Destination-based layer 2 (switch) forwarding:

Switch Port	MAC src	MAC dst	Eth type	VLAN ID	IP Src	IP Dst	IP Prot	TCP sport	TCP dport	Action
*	22:A7:23: 11:E1:02	*	*	*	*	*	*	*	*	port3

*layer 2 frames from MAC address 22:A7:23:11:E1:02 should be forwarded to switch output port 3*

# Examples: Firewall Functionality

## Firewall:

Switch Port	MAC src	MAC dst	Eth type	VLAN ID	IP Src	IP Dst	IP Prot	TCP sport	TCP dport	Forward
-------------	---------	---------	----------	---------	--------	--------	---------	-----------	-----------	---------

\* \* \* \* \* \* \* \* \* 22 drop

*do not forward (block) all datagrams destined to TCP port 22*

Switch Port	MAC src	MAC dst	Eth type	VLAN ID	IP Src	IP Dst	IP Prot	TCP sport	TCP dport	Forward
-------------	---------	---------	----------	---------	--------	--------	---------	-----------	-----------	---------

\* \* \* \* \* 128.119.1.1 \* \* \* \* drop

*do not forward (block) all datagrams sent by host 128.119.1.1*


# OpenFlow abstraction

- *match+action*: unifies different kinds of devices
- Router
  - *match*: longest destination IP prefix
  - *action*: forward out a link
- Switch
  - *match*: destination MAC address
  - *action*: forward or flood
- Firewall
  - *match*: IP addresses and TCP/UDP port numbers
  - *action*: permit or deny
- NAT
  - *match*: IP address and port
  - *action*: rewrite address and port

# OpenFlow example

*Example:* datagrams from hosts h5 and h6 should be sent to h3 or h4, via s1 and from there to s2

match	action
IP Src = 10.3.*.* IP Dst = 10.2.*.*	forward(3)

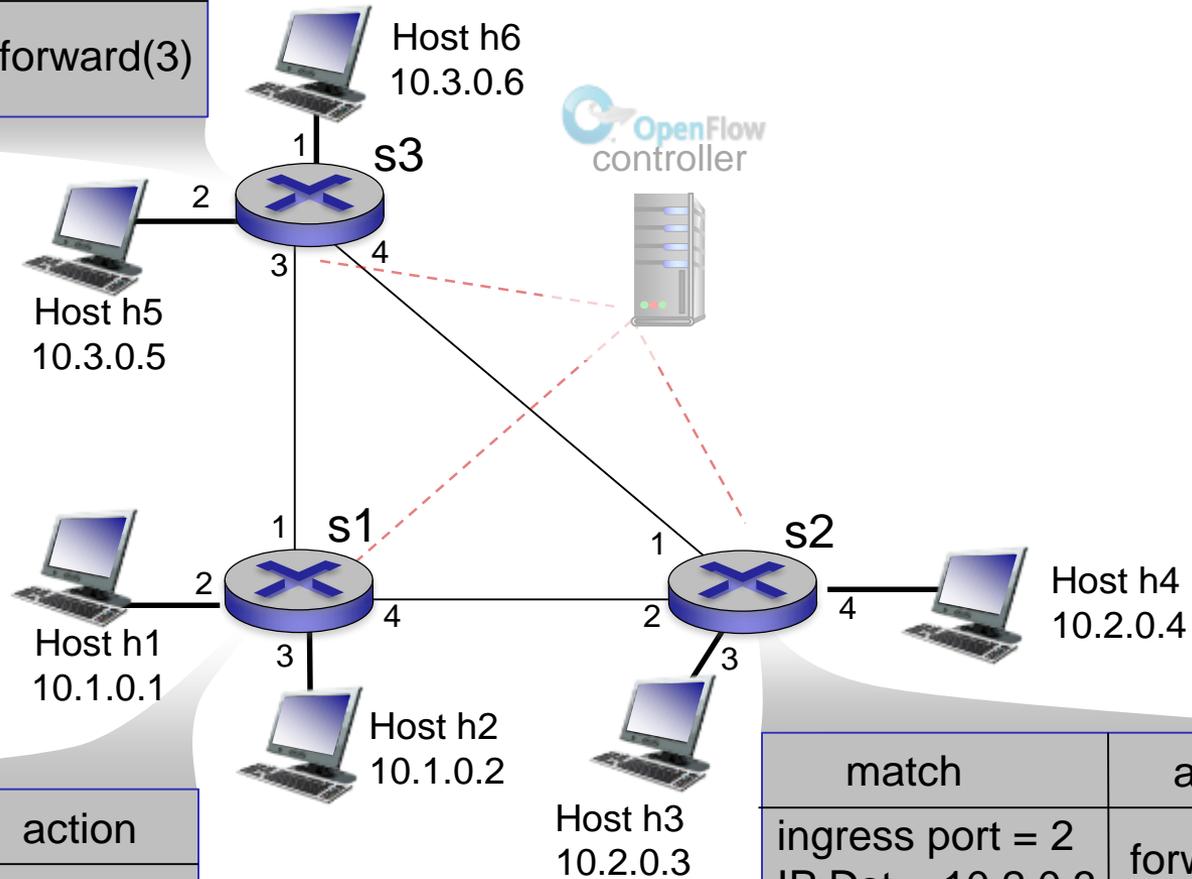

match	action
ingress port = 1 IP Src = 10.3.*.* IP Dst = 10.2.*.*	forward(4)

match	action
ingress port = 2 IP Dst = 10.2.0.3	forward(3)
ingress port = 2 IP Dst = 10.2.0.4	forward(4)

# SDN: selected challenges

- hardening the control plane: dependable, reliable, performance-scalable, secure distributed system
  - robustness to failures: leverage strong theory of reliable distributed system for control plane
  - dependability, security: “baked in” from day one?
- networks, protocols meeting mission-specific requirements
  - e.g., real-time, ultra-reliable, ultra-secure
- Internet-scaling