


Introduction To Files In Pascal

In this section of notes you will learn how to read from and write to files in Pascal.

James Tam

What You Know About Input And Output


Comes from the user or is displayed to the user

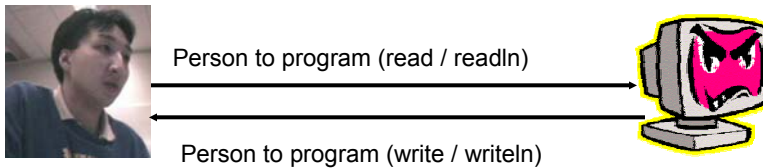

James Tam

What You Will Learn: Input And Output Using Files

Information is retrieved from and written out to a file
(typically on disk)

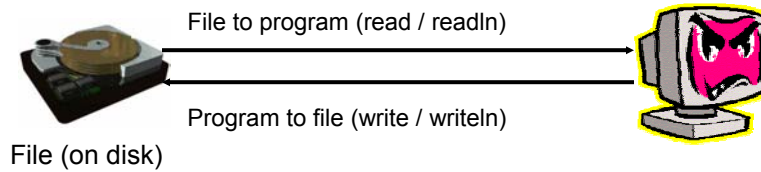

James Tam

Why Bother With Files?

- Too much information to input all at once
- The information must be persistent (RAM is volatile)
- Etc.

James Tam

What You Need In Order To Read Information From A File

1. Declare a file variable
2. Open the file
3. A command to read the information

James Tam

1. Declaring File Variables

Allows the program access to a file

Format:

name of file variable : text;

Example:

letterGrades : text;

James Tam

2. Opening Files

Prepares the file for reading:

- A. Links the file variable with the physical file (references to the file variable are references to the physical file)
- B. Positions the file pointer

Format:

```
reset (name of file variable, location and name of file);
```

Example:

(File variable declaration for constant or variable filename)

```
var letterGrades : text;
```

(Constant file name)

```
reset (letterGrades, 'letterGrades.txt');
```

OR

(Variable file name)


```
var inputFile : string [80];
```

```
readln(inputFile);
```

```
reset(letterGrades, inputFile);
```

James Tam

A. Linking The File Variable With The Physical File

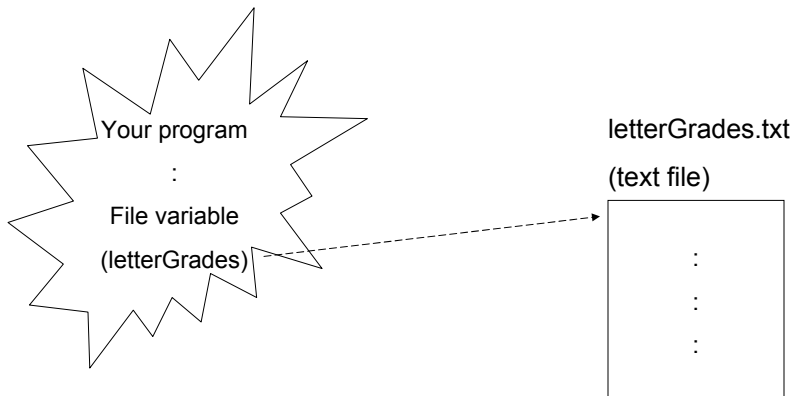

James Tam

B. Positioning The File Pointer

letterGrades.txt

```
A
↑
B
C
B
B
:
```

James Tam

3. Reading Information From Files

Performed with `read` or `readln`

Format:

`read (name of file variable, variable to store the information);`

`readln (name of file variable, variable to store the information);`

Example:

`readln(letterGrades, letter);`

James Tam

3. Reading Information From Files (2)

Typically reading is done within the body of a loop

Format:

```
while NOT EOF (name of file variable) do
begin
    read (name of file variable, variable to store the information);
    OR
    readln (name of file variable, variable to store the information);
end; (* Done reading from input file *)
```

Example:

```
while NOT EOF (letterGrades) do
begin
    readln(letterGrades, letter);
    writeln(letter);
end; (* Loop to read letter grades file *)
```

James Tam

An Alternative Approach To Reading Files

- Employ a sentinel in the file
- Keep reading from the file until the sentinel value is encountered

Example:

```
var inputFile : text;
var num      : integer;
    :        :
readln (inputFile, num);
while NOT (num = -1) do
begin
    writeln(num);
    readln(inputFile, num);
end; (* Done reading input file *)
```

James Tam

Reading From Files: Putting It All Together

A complete version of this program can be found in Unix under
/home/231/examples/files/grades.p:

```
program grades (output);
const
  FILENAME_LENGTH = 256;
begin
  var letterGrades : text;
  var letter       : char;
  var inputFile    : string[FILENAME_LENGTH];

  write('Enter name of input file: ');
  readln(inputFile);
  reset(letterGrades, inputFile);
  writeln('Opening file ', inputFile, ' for reading. ');
  while NOT EOF (letterGrades) do
  begin
    readln(letterGrades, letter);
    writeln(letter);
  end;
end;
```


James Tam

Reading From Files: Putting It All Together (2)

```
close(letterGrades);
writeln('Completed reading of file ', inputFile);
end.
```

James Tam

View Of Files In Unix

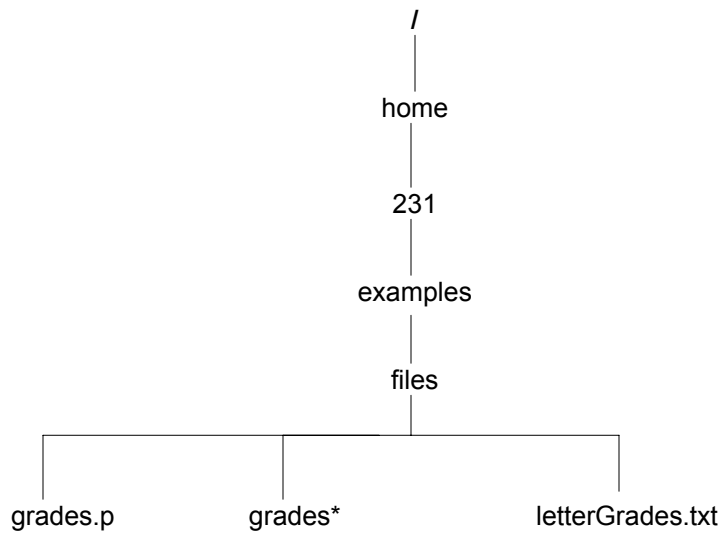

James Tam

What You Need To Write Information To A File

1. Declare a file variable
2. Open the file
3. A command to write the information

James Tam

1. Declaring An Output File Variable

- No difference in the declaration of a file variable when writing to a file from the case of reading from a file.

Format:

name of file variable: text;

Example:

```
letterGrades : text;
```

```
gradePoints : text;
```

James Tam

2. Opening The File

Two methods:

- 1) Rewriting – erases the old contents of the file (*rewrites* over what was already there).
- 2) Appending – retain the old contents of the file (*appends* the new information at the end).

Format (rewriting / appending):

rewrite (name of file variable, location and name of physical file);

append (name of file variable, location and name of physical file);

Example (rewriting / appending):

(Constant file name)

```
var gradePoints : text;
```

```
rewrite(gradePoints, 'gradePoints.txt');
```

```
append(gradePoints, 'gradePoints.txt');
```

James Tam

Opening The File (2)

Example (rewriting / appending):

(Variable file name)

```
var outputFile : string[80];
```

```
var gradePoints : text;
```

```
write('Enter the name of the output file: ');
```

```
readln (outputFile);
```

```
rewrite(gradePoints, outputFile);
```

OR

```
append(gradePoints, outputFile);
```

James Tam

3. Writing To A File

Format:

```
write (name of file variables, variable(s) and/or strings to write);
```

```
writeln (name of file variables, variable(s) and/or strings to write);
```

Example:

```
writeln(gradePoints, gpa);
```

James Tam

Writing To A File: Putting It All Together

A complete version of this program can be found in Unix under:
/home/231/examples/files/grades2.p

```
program grades (output);

const
  FILE_NAME_LENGTH = 256;

begin
  var letterGrades    : text;
  var gradePoints    : text;
  var letter         : char;
  var gpa            : integer;
  var inputFileName  : string[FILE_NAME_LENGTH];
  var outputFileName : string[FILE_NAME_LENGTH];
```

James Tam

Writing To A File: Putting It All Together (2)

```
write('Enter the name of file that contains the letter grades: ');
readln(inputFileName);
write('Enter the name of the file to store the grade points: ');
readln(outputFileName);

reset(letterGrades, inputFileName);
rewrite(gradePoints, outputFileName);

writeln('Opening file ', inputFileName, ' for reading. ');
writeln('Opening file ', outputFileName, ' for writing. ');
```

James Tam

Writing To A File: Putting It All Together (3)

```
while NOT EOF (letterGrades) do
begin
  readln(letterGrades, letter);
  case (letter) of
    'A'   :   gpa := 4;
    'B'   :   gpa := 3;
    'C'   :   gpa := 2;
    'D'   :   gpa := 1;
    'F'   :   gpa := 0;
    else   :   gpa := -1;
  end; (* case *)
  writeln(gradePoints, gpa);
end; (* Loop to read letter grades file *)
```

James Tam

Writing To A File: Putting It All Together (4)

```
writeln('Completed reading and writing to files. ');
close(letterGrades);
close(gradePoints);
end.
```

James Tam

Details Of Write And Writeln For Files: Intuitive View

Program statement	Effect on file
<code>rewrite(data, 'data.txt');</code>	(Open file "data.txt" and position file pointer at start) ^
<code>write (data, 'x');</code>	<u>x</u> ^
<code>write(data, 'y');</code>	<u>xy</u> ^
<code>write(data, 'z');</code>	<u>xyz</u> ^
<code>writeln(data);</code>	<u>xyz</u> - ^
<code>write(data, 'a');</code>	<u>xyz</u> <u>a</u> ^

James Tam

Details Of Write And Writeln For Files: Actual View

Program statement	Effect on file
<code>rewrite(data, 'data.txt');</code>	(Open file "data.txt" and position file pointer at start) ^
<code>write (data, 'x');</code>	<u>x</u> ^
<code>write(data, 'y');</code>	<u>xy</u> ^
<code>write(data, 'z');</code>	<u>xyz</u> ^
<code>writeln(data);</code>	<u>xyz<EOL></u> ^
<code>write(data, 'a');</code>	<u>xyz<EOL>a</u> ^

James Tam

Details Of Read And Readln For Files: Intuitive View¹

Program statement	Effect on file	Effect in program
reset (data, 'data.txt');	xyz ^ a	(Open file "data.txt" and position file pointer at start)
read(data, ch);	xyz ^ a	Value of ch: 'x'
readln(data, ch);	xyz a ^	Value of ch: 'y'
read(data, ch);	xyz a ^	Value of ch: 'a'

¹ Assume that the code on the previous slide has created the file called "data.txt"

James Tam

Details Of Read And Readln For Files: Actual View¹

Program statement	Effect on file	Effect in program
reset (data, 'data.txt');	xyz<EOL>a ^	(Open file "data.txt" and position file pointer at start)
read(data, ch);	xyz<EOL>a ^	Value of ch: 'x'
readln(data, ch);	xyz<EOL>a ^	Value of ch: 'y'
read(data, ch);	xyz<EOL>a ^	Value of ch: 'a'
read(data, ch);	xyz<EOL>a ^	

¹ Assume that the code on the previous slide has created the file called "data.txt"

James Tam

Details Of Read And Readln For Files: Actual View¹

Program statement	Effect on file	Effect in program
<code>reset (data, 'data.txt');</code>	<code>xyz<EOL>a</code> ^	(Open file "data.txt" and position file pointer at start)
<code>read(data, ch);</code>	<code>xyz<EOL>a</code> ^	Value of ch: 'x'
<code>readln(data, ch);</code>	<code>xyz<EOL>a</code> ^	Value of ch: 'y'
<code>read(data, ch);</code>	<code>xyz<EOL>a</code> ^	Value of ch: 'a'
<code>read(data, ch);</code>	<code>xyz<EOL>a</code> ^	Error: read past the end of the file

¹ Assume that the code on the previous slide has created the file called "data.txt"

James Tam

Explicitly Dealing With Empty Files

Recall:

EOF (*name of file variable*)

- Q: Has the end of file been reached:
- Returns true if the file pointer is not pointing at a character in the file.
- Returns false if the file pointer is pointer at a character in the file.

James Tam

Explicitly Dealing With Empty Files: An Example

A complete version of this program can be found in Unix under:
/home/231/examples/files/fileExampleThree.p

```
program fileExampleThree (input,output);

const
  FILENAME_LENGTH = 256;
  LINE_LENGTH = 80;

begin
  var inputFilename    : string[FILENAME_LENGTH];
  var inputFileVariable : text;
  var line             : string[LINE_LENGTH];

  write('Enter the name of the input file: ');
  readln(inputFilename);
  reset(inputFileVariable,inputFilename);
```

James Tam

Explicitly Dealing With Empty Files: An Example (2)

```
if EOF (inputFileVariable) then
begin
  writeln('File ', inputFilename, ' is empty.');
```

```
end
else
begin
  writeln('Opening file ', inputFilename, ' for reading');
  while NOT EOF (inputFileVariable) do
  begin
    readln(inputFileVariable,line);
    writeln(line);
  end;
end;
writeln('Closing file ', inputFilename);
close(inputFileVariable);
end.
```

James Tam

Passing File Variables As Parameters

Must be passed as variable parameters *only*.

Format:

```
procedure nameProcedure (var nameFile : text);
```

Example:

```
procedure fileInputOutput (var letterGrades : text;  
                           var gradePoints : text);
```

James Tam

You Should Now Know

- How to declare a file variable
- How to open a file for reading
- How to open a file a file for writing (rewrite and append mode)
- How to read (read/readln) from and write (write/writeln) to a file
- The details of how information is read from and written to a file
- How to close a file and why it is good practice to do this explicitly
- How to explicitly deal with empty files
- How to pass file variables as parameters

James Tam