


Arrays

In this section of notes you will be introduced to a composite type where all elements must be of the same type (homogeneous): arrays


James Tam

Types Of Variables

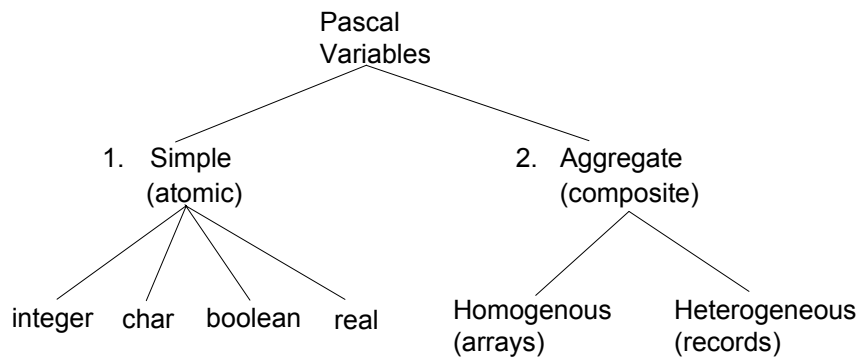

James Tam

Types Of Variables

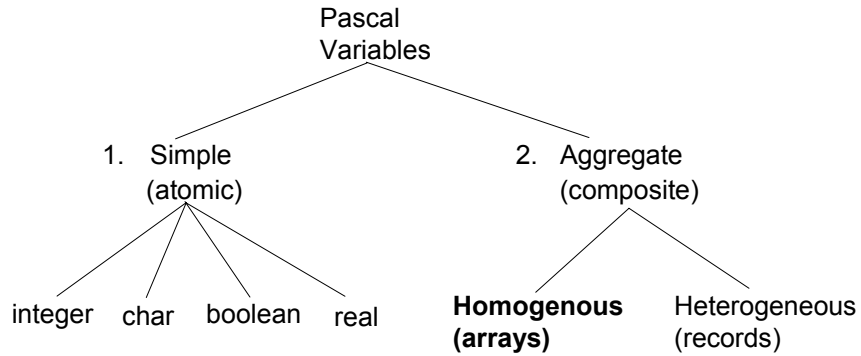

James Tam

Example Problem

Write a program that will track the percentage grades for a class of students. The program should allow the user to enter the grade for each student. Then it will display the grades for the whole class along with the average.

James Tam

Why Bother With Composite Types?

For a compilable example look in Unix under:
/home/231/tamj/examples/arrays/classList1.p

```
const
  CLASS_SIZE = 5;
begin
  var stu1   : real;
  var stu2   : real;
  var stu3   : real;
  var stu4   : real;
  var stu5   : real;
  var total  : real;
  var average : real;
```

James Tam

Why Bother With Composite Types? (2)

```
write('Enter grade for student number 1: ');
readln(stu1);
write('Enter grade for student number 2: ');
readln(stu2);
write('Enter grade for student number 3: ');
readln(stu3);
write('Enter grade for student number 4: ');
readln(stu4);
write('Enter grade for student number 5: ');
readln(stu5);
total := stu1 + stu2 + stu3 + stu4 + stu5;
average := total / CLASS_SIZE;
writeln('The average grade is ', average:6:2, '%');
```

James Tam

With Bother With Composite Types? (3)

(* Printing the grades for the class. *)

```
writeln('Student1: ', stu1:6:2);
```

```
writeln('Student2: ', stu2:6:2);
```

```
writeln('Student3: ', stu3:6:2);
```

```
writeln('Student4: ', stu4:6:2);
```

```
writeln('Student5: ', stu5:6:2);
```

```
end.
```

James Tam

With Bother With Composite Types? (3)

(* Printing the grades for the class. *)

```
writeln('Student1: ', stu1:6:2);
```

```
writeln('Student2: ', stu2:6:2);
```

```
writeln('Student3: ', stu3:6:2);
```

```
writeln('Student4: ', stu4:6:2);
```

```
writeln('Student5: ', stu5:6:2);
```

```
end.
```

NO!

James Tam

What's Needed

- A composite variable that is a collection of another type.
 - The composite variable can be manipulated and passed throughout the program as a single entity.
 - At the same time each element can be accessed individually.
- What's needed...an array!

James Tam

Declaring Arrays

As with any other variable, you must first create an array in memory by declaring an instance.

Format:

name: array [*low index*..*high index*] of *element type*;

Example:

const

CLASS_SIZE = 5;

: :

var classGrades : array [1..CLASS_SIZE] of real;


classGrades [1]	
[2]	
[3]	
[4]	
[5]	

James Tam

Accessing Data In The Array


To manipulate an array you need to first indicate which array is being accessed

- Done via the name of the array e.g., “classGrades”

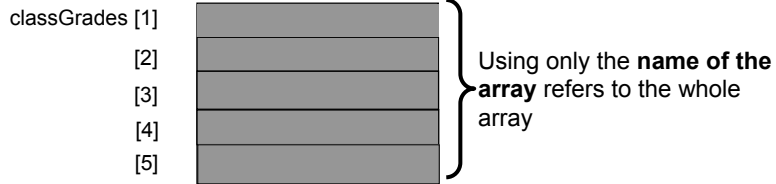

If you are accessing a single element, you need to indicate which element that you wish to access.

- Done via the array index e.g., “classGrades[2]”

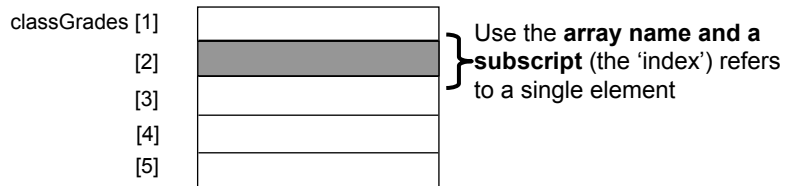

James Tam

Assigning Data To The Array

Format:

(Whole array)

name of array := value;

(One element)

name of array [index] := value;

Examples (assignment via the assignment operator):

(Whole array)

firstArray := secondArray;

(One element)

classGrades [1] := 100;

James Tam

Assigning Data To The Array (2)

Examples (assigning values via read or readln):

(Single element)

```
readln(classGrades[1]);
```

(Whole array – all elements)

```
for i: = 1 to CLASS_SIZE do
```

```
begin
```

```
    write('Input grade for student No. ', i, ': ');
```

```
    readln(classGrades[i]);
```

```
end;
```

James Tam

Assigning Data To The Array (3)

Example: (Whole array – all elements: Character arrays only)

```
var charArray : array [1..SIZE] of char;
```

```
readln(charArray);
```

Important note: arrays cannot be passed as a parameters to read or readln (except for one-dimensional character arrays)

James Tam

Accessing The Data In The Array

Examples (displaying information):

(Single element)

```
writeln(classGrades[1]);
```

(Whole array – all elements)

```
for i := 1 to CLASS_SIZE do
```

```
    writeln('Grade for student No. ', i:2, ', ', classGrades[i]:6:2);
```

James Tam

Accessing The Data In The Array (2)

Example: (Whole array – all elements: Character arrays only)

```
var charArray : array [1..SIZE] of char;
```

```
write(charArray);
```

Important note: arrays cannot be passed as a parameters to write or writeln (except for one-dimensional character arrays)

James Tam

Revised Version Using An Array

For a compilable example look in Unix under:

/home/231/tamj/examples/arrays/classList2.p

```
const
  CLASS_SIZE = 5;
begin
  var classGrades : array [1..CLASS_SIZE] of real;
  var i           : integer;
  var total       : real;
  var average     : real;

  total := 0;
```

James Tam

Class Example Using An Array (2)

```
for i := 1 to CLASS_SIZE do
begin
  write('Enter grade for student no. ', i, ': ');
  readln (classGrades[i]);
  total := total + classGrades[i];
end;
average := total / CLASS_SIZE;
writeln;
writeln('The average grade is ', average:6:2, '%');

for i := 1 to CLASS_SIZE do
  writeln('Grade for student no. ', i, ' is ', classGrades[i]:6:2, '%');
```

James Tam

Passing Arrays As Parameters

1. Declare a type for the array.

e.g.


const

```
CLASS_SIZE = 5;
```

type

```
Grades = array [1..CLASS_SIZE] of real;
```

- Declaring a type does not create an instance
 - A type only describes the attributes of a new kind of variable that can be created and used.
 - No memory is allocated.



James Tam

Passing Arrays As Parameters (2)

2. Declare an instance of this type.

e.g., var lecture01 : Grades;

- Memory is allocated!



3. Pass the instance to functions/procedures as you would any other parameter.

(Function/procedure call)

```
displayGrades (lecture01, average);
```

(Function/procedure definition)

```
procedure displayGrades (lecture01 : Grades;  
                        average : real);
```

James Tam

Passing Arrays As Parameters: An Example

The full example can be found in Unix under
/home/231/tamj/examples/classList3.p):

```
program classList (input, output);

const
  CLASS_SIZE = 5;

type
  Grades = array [1..CLASS_SIZE] of real;

procedure tabulateGrades (var lecture01 : Grades;
                          var average : real);

var
  i : integer;
  total : real;
```

James Tam

Passing Arrays As Parameters: An Example (2)

```
begin (* tabulateGrades *)
  total := 0;
  for i := 1 to CLASS_SIZE do
    begin
      write('Enter grade for student no. ', i, ': ');
      readln(lecture01[i]);
      total := total + lecture01[i];
    end;
  average := total / CLASS_SIZE;
  writeln;
end; (* tabulateGrades *)
```

James Tam

Passing Arrays As Parameters: An Example (3)

```
procedure displayGrades (lecture01 : Grades;
                        average : real);
var
  i : integer;
begin
  writeln('Grades for the class...');
  for i := 1 to CLASS_SIZE do
    writeln('Grade for student no. ', i, ' is ', lecture01[i]:6:2, '%');
  writeln('The average grade is ', average:6:2, '%');
  writeln;
end;
```

James Tam

Passing Arrays As Parameters: An Example (4)

```
begin
  var lecture01 : Grades;
  var average : real;
  tabulateGrades (lecture01, average);
  displayGrades (lecture01, average);
end.
```

James Tam

Returning Arrays From Functions

1. Declare a type for the array.

e.g.

```
const
```

```
    CLASS_SIZE = 5;
```

```
type
```

```
    Grades = array [1..CLASS_SIZE] of real;
```

2. Declare an instance of this type.

e.g.,

```
var lecture01 : Grades;
```

3. Return the instance of the array as you would any other return value.

(Function call)


```
lecture01 := fun (lecture01);
```

(Function definition)

```
function fun (lecture01 : Grades ): Grades;
```


James Tam

Segmentation Faults And The Array Bounds (2)

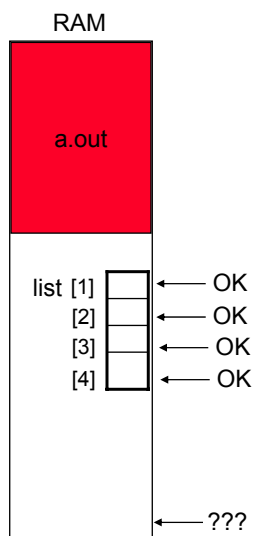

James Tam

Segmentation Faults And The Array Bounds (2)

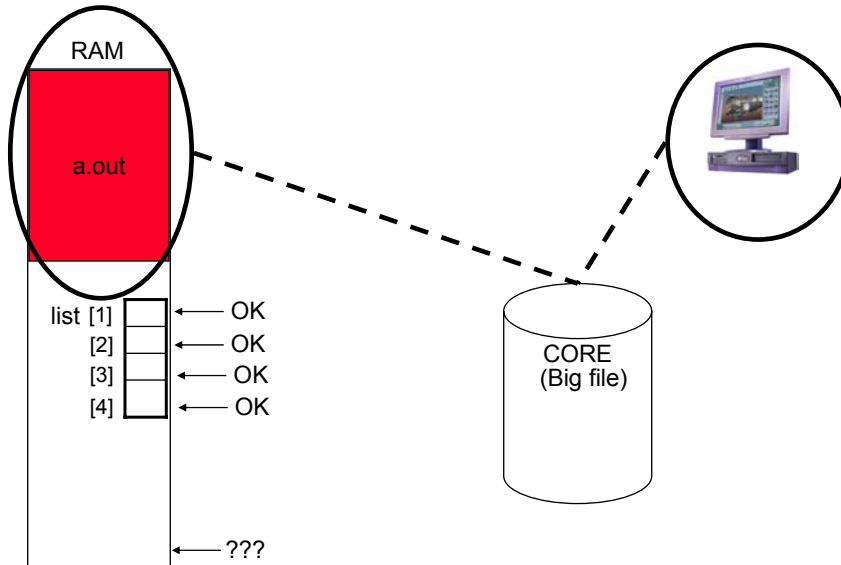

Wav file from "The Simpsons"

James Tam

Segmentation Faults And The Array Bounds (3)

- When using an array take care not to exceed the bounds.
- Ways of reducing the likelihood of exceeding the bounds of the array:
 1. Use a constant in conjunction with arrays e.g.,

```
const
MAX = 5;
```
 2. Refer to the constant when declaring an array:

```
var aList : array [1..MAX] of integer;
```
 3. Refer to the constant when declaring the type for the array:

```
type
List = array [1..MAX] of integer;
```
 4. Refer to the constant when iterating/traversing through the array:

```
for i := 1 to MAX do
writeln('Grade for student no. ', i, ' is ', lecture01[i]:6:2, '%');
```

James Tam

Segmentation Faults And The Array Bounds (4)

5. Make sure that array indices are properly initialized.
- You may need to verify this assumption with debugging statements.

Incorrect ☹: What is the current value of index 'i'?

```
program array1 (output);
begin
  var i : integer;
  var list : array [1..2] of integer;
  list [i] := i;
  writeln (list[i]);
end.
```

Correct ☺: Always initialize your variables before using them: in this case the index 'i' is set to a value within the bounds of the array before it's used.

```
program array2 (output);
begin
  var i : integer;
  var list : array [1..2] of integer;
  i := 2;
  list [i] := i;
  writeln (list[i]);
end.
```

James Tam

The String Type

It is a special type of character array.

Format for declaration:

```
var name : string [No of elements];
```

Example declaration:

```
var firstName : string [MAX];
```

James Tam

Benefits Of The String Type

1. The end of array is marked.
2. Many operations have already been implemented.

James Tam

Marking The End Of The Array

The full example can be found in Unix under the path:
`/home/231/tamj/examples/arrays/stringExample.p`

```
program stringExample (output);
const
  MAX = 8;
begin
  var list1 : array [1..MAX] of char;
  var list2 : string[MAX];
  list1 := 'abcdefg';
  list2 := 'abcdefg';
  writeln('-', list1, '-');
  writeln('-', list2, '-');
end.
```

James Tam

The Contents Of The String “List2”

[1]	[2]	[3]	[4]	[5]	[6]	[7]	[8]
'a'	'b'	'c'	'd'	'e'	'f'	'g'	END

James Tam

Strings Are A Built-In Type¹

- This means that they can be passed as parameter in the same fashion as other built in types, no type needs to be defined beforehand.

Format:

```
procedure procedureName (stringName : string);  
OR  
procedure procedureName (var stringName : string);
```

Examples:

```
procedure proc1 (list : string);  
OR  
procedure proc2 (var list : string);
```

¹ For many programming languages and some versions of Pascal


James Tam

When To Use Arrays Of Different Dimensions

- Determined by the data – the number of categories of information determines the number of dimensions to use.

Examples:

- (1D array)
 - Tracking grades for a class
 - Each cell contains the grade for a student i.e., grades[i]
 - There is one dimension that specifies which student's grades are being accessed



- (2D array)
 - Expanded grades program
 - Again there is one dimension that specifies which student's grades are being accessed
 - The other dimension can be used to specify the lecture section

James Tam

When To Use Arrays Of Different Dimensions (2)

- (2D array continued)

Student


Lecture section

	First student	Second student	Third student	...
L01				
L02				
L03				
L04				
L05				
:				
L0N				

James Tam

When To Use Arrays Of Different Dimensions (3)


- (2D array continued)
- Notice that each row is merely a 1D array
- (A 2D array is an array containing rows of 1D arrays)

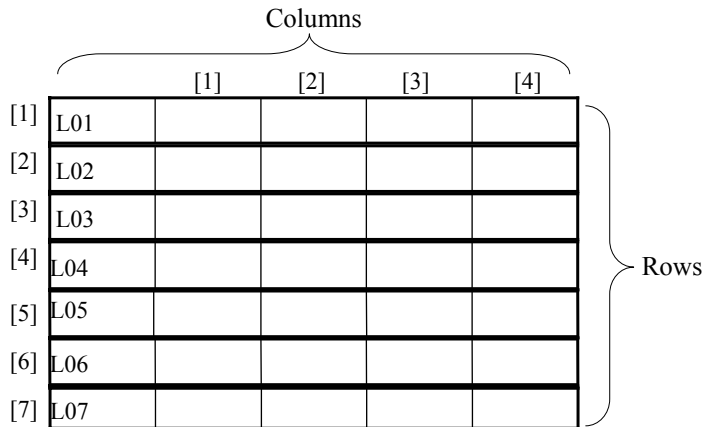

James Tam

When To Use Arrays Of Different Dimensions (4)

- (3D array – take the 2D array but allow for multiple courses).
- The third dimension specifies which course grades are being tracked.

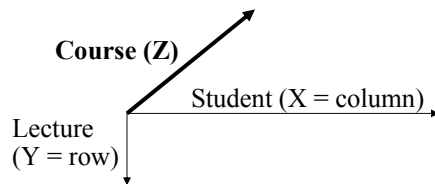

Note:

1. The standard approach for specifying the dimensions is to specify the row coordinate (Y) *and then* the column coordinate (X).
2. The size of a dimension must be the same for all elements along that dimension e.g., all rows must be of the same size

James Tam

When To Use Arrays Of Different Dimensions (5)

	Student 1	Student 2	Student 3	...
L01				
L02				
L03				
L04				
L05				
L06				
L07				

James Tam

Declaring Multi-Dimensional Arrays

Format:

(Two dimensional arrays)

Name : array [*min..max*, *min..max*] of *type*;

(Three dimensional arrays)

Name : array [*min..max*, *min..max*, *min..max*] of *type*;

← Rows ← Columns

Examples:

```
var johnFinances : array [1..3, 1..7] of real;
```

```
var cube          : array[1..6, 1..6, 1..6] of char;
```

James Tam

Declaring Multi-Dimensional Arrays As A Type

Format:

Type declaration

Type name = array [*min..max*, *min..max*] of *element type*;

Type name = array [*min..max*, *min..max*, *min..max*] of *element type*;

Variable declaration

array name : *Type name*;

James Tam

Declaring Multi-Dimensional Arrays As A Type (2)

Example:

Type declaration

Finances = array [1..3, 1..7] of real;

Cube = array [1..6, 1..6, 1..6] of char;

Variable declaration

var johnFinances : Finances;

var aCube : Cube;

James Tam

Accessing / Assigning Values To Elements

Format:

```
name [row][column] := name [row][column];
```

Example:

```
finances [1][1] := 4500;  
writeln (finances[1][1]);
```

James Tam

Multi-Dimensional Arrays And Input/Output

- Arrays of more than one dimension (including multi-dimensional character arrays) cannot be passed as parameters to: read, readln, write, writeln.
- Only one-dimensional character arrays can be passed as parameters to these procedures.

James Tam

Example 2D Array Program: A Character-Based Grid

You can find the full program in Unix under:
`/home/231/tamj/examples/arrays/grid.p`

James Tam

A Character-Based Grid

```
program gridExample (input, output);
```

```
const
```

```
    MAX_ROWS      = 4;
```

```
    MAX_COLUMNS   = 4;
```

```
    NO_COMBINATIONS = 10;
```

```
type
```

```
    Grid = array[1..MAX_ROWS, 1..MAX_COLUMNS] of char;
```

James Tam

A Character-Based Grid (2)

```
function generateElement (temp : integer) : char;
var
  anElement : char;
begin
  case (temp) of
    1, 2, 3, 4, 5, 6 :
      anElement := '!';

    7, 8, 9:
      anElement := '*';

    10:
      anElement := '.';
```

James Tam

A Character-Based Grid (3)

```
else
begin
  writeln('<<< Error with the random no. generator.>>');
  writeln('<<< Value should be 1-10 but random value is ', temp);
  anElement := '!';
end;
end;
generateElement := anElement;
end;
```

James Tam

A Character-Based Grid (4)

```
procedure initialize (var aGrid : Grid);
var
  r    : integer;
  c    : integer;
  temp : integer;
begin
  for r := 1 to MAX_ROWS do
  begin
    for c := 1 to MAX_COLUMNS do
    begin
      temp := random(NO_COMBINATIONS) + 1;
      aGrid[r][c] := generateElement(temp);
    end;
  end;
end;
```

James Tam

A Character-Based Grid (5)

```
procedure display (aGrid : Grid);
var
  r : integer;
  c : integer;
begin
  for r := 1 to MAX_ROWS do
  begin
    for c := 1 to MAX_COLUMNS do
    begin
      write(aGrid[r][c]);
    end;
    writeln;
  end;
end;
```

James Tam

A Character-Based Grid (6)

```
procedure displayLines (aGrid : Grid);
var
  r : integer;
  c : integer;
begin
  for r := 1 to MAX_ROWS do
  begin
    writeln(' - - - ');
    for c := 1 to MAX_COLUMNS do
    begin
      write('|', aGrid[r][c]);
    end;
    writeln('|');
  end;
  writeln(' - - - ');
end;
```

James Tam

A Character-Based Grid (7)

```
begin
  var aGrid : Grid;
  initialize(aGrid);
  writeln('Displaying grid');
  writeln('=====');
  display(aGrid);
  writeln;
  writeln('Displaying grid with bounding lines');
  writeln('=====');
  displayLines(aGrid);
end.
```

James Tam

Valid Operators: 1D Character Arrays And Strings

- The relational operators will work with the String type and 1-dimensional character arrays.
- They will not work with other type of arrays.

James Tam

You Should Now Know

- What is the difference between simple types (atomic) and composite types (aggregate).
- What is the benefit of using homogeneous composite types (arrays)
- How to declare arrays.
- How to access or assign values to array elements.
- How to work with an entire array (e.g., access or assign values to different parts).
- How to pass instances of arrays into functions and procedures and how to return an array from a function.
- What is a segmentation fault and what is a core dump file.
- How to declare and to use instances of a string type.
- The number of dimensions to declare for an array.
- How to declare and traverse arrays of multiple dimensions.
- How to display “bounding lines” around array elements as a formatting technique.

James Tam