

Functions: Decomposition And Code Reuse

This section of notes shows you how to write functions that can be used to: decompose large problems, and to reduce program size by creating reusable sections.

Example Programs

- Location (via the WWW):
 - <http://pages.cpsc.ucalgary.ca/~tamj/231/examples/functions>
- Location (via the CPSC UNIX network):
 - /home/231/examples/functions

Tip For Success: Reminder


- Look through the examples and notes before class.
- This is especially important for this section because the execution of these programs will not be in sequential order.
- Instead execution will appear to ‘jump around’ so it will be harder to understand the concepts and follow the examples illustrating those concepts if you don’t do a little preparatory work.

Solving Larger Problems

- Sometimes you will have to write a program for a large and/or complex problem.
- One technique employed in this type of situation is the top down approach to design.
 - The main advantage is that it reduces the complexity of the problem because you only have to work on it a portion at a time.

Top Down Design


1. Start by outlining the major parts (structure)

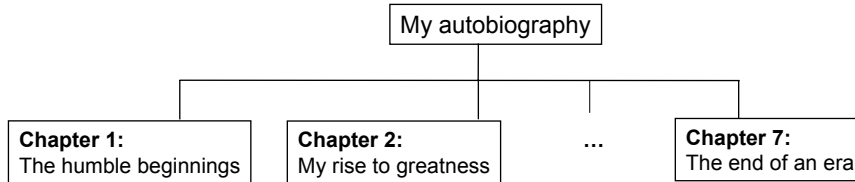

2. Then implement the solution for each part




Breaking A Large Problem Down

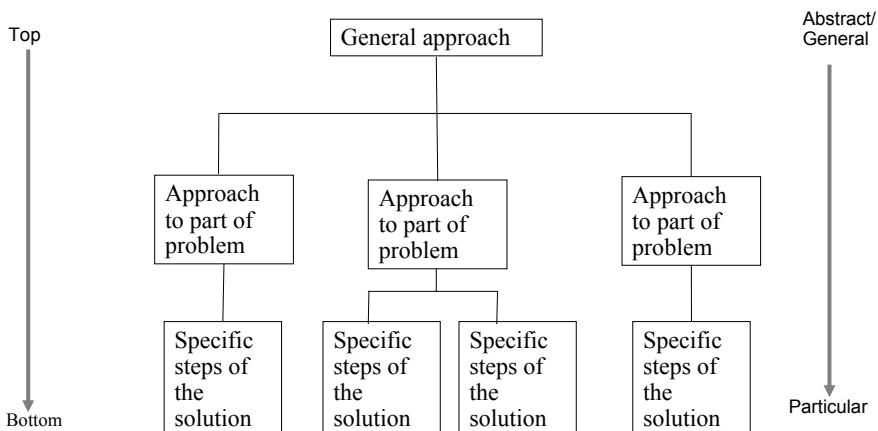

Procedural Programming

- Applying the top down approach to programming.
- Rather than writing a program in one large collection of instructions the program is broken down into parts.
- Each of these parts are implemented in the form of procedures (also called “functions” or “methods” depending upon the programming language).

Procedural Programming

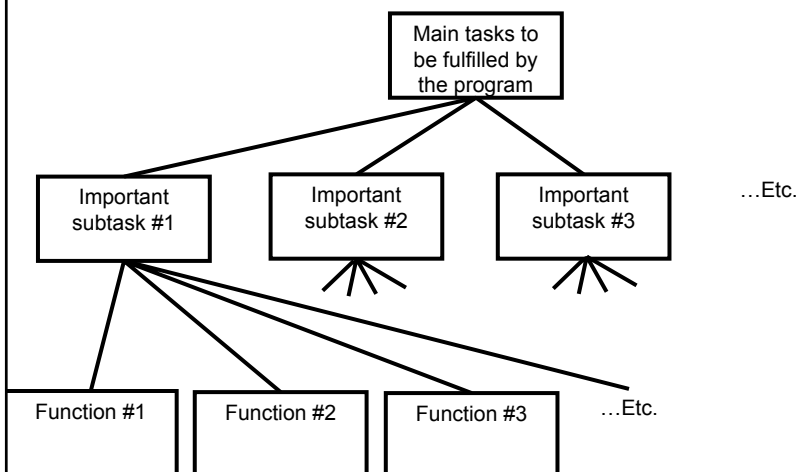

Why Decompose

- Why not just start working on the details of the solution without decomposing it into parts.

- "I want to **do* not plan and design!*"


Here is the first of my many witty anecdotes, it took place in a "Tim Horton's" in Balzac..

**Just start writing
without worrying
about how things will
be laid out and
structured.**

- Potential problems:

- Redundancies and lack of coherence between sections.

- Trying to implement all the details of large problem all at once may prove to be overwhelming ("*Where do I start???!?!?*")



An actual assignment
from this class


Decomposing A Problem Into Procedures

- Break down the program by what it does (described with *actions/verbs*).
- Eventually the different parts of the program will be implemented as functions.

Example Problem

- Design a program that will perform a simple interest calculation.
- The program should prompt the user for the appropriate values, perform the calculation and display the values onscreen.
- Action/verb list:
 - Prompt
 - Calculate
 - Display


Top Down Approach: Breaking A Programming Problem Down Into Parts (Functions)

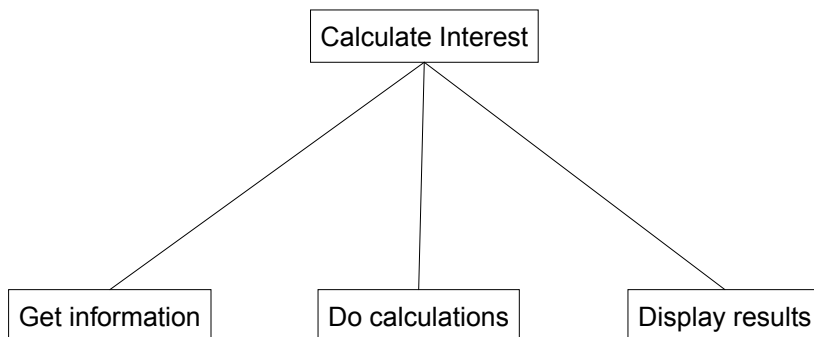

Things Needed In Order To Use Functions

- Definition
 - Instructions that indicate what the function will do when it runs.
- Call
 - Actually running (executing) the function.
- Note: a function can be called multiple (or zero) times but it can only be defined once. Why?

Functions (Basic Case)

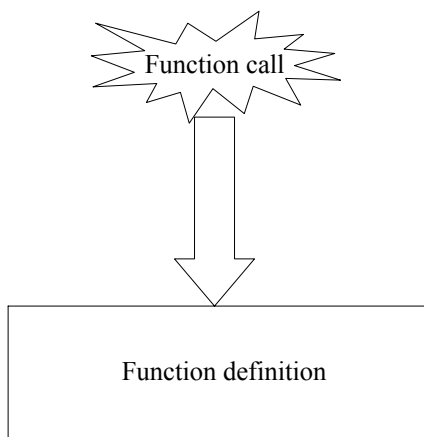

Defining A Function

- Format:**

```
def <function name> ():  
    body1
```

- Example:**

```
def displayInstructions ():  
    print ("Displaying instructions")
```

¹ Body = the instruction or group of instructions that execute when the function executes.

The rule in Python for specifying what statements are part of the body is to use indentation.

Calling A Function

- Format:**

```
<function name> ()
```

- Example:**

```
displayInstructions ()
```


Functions: An Example That Puts Together All The Parts Of The Easiest Case

- Name of the example program: firstExampleFunction.py

```
def displayInstructions ():  
    print ("Displaying instructions")  
  
# Main body of code (starting execution point)  
displayInstructions()  
print ("End of program")
```

The diagram illustrates the execution flow. A red box highlights the function definition block. A red arrow points from the start of the function definition to the function call in the main body of code. Another red arrow points from the function call back to the function definition, indicating the call to the function.

Functions: An Example That Puts Together All The Parts Of The Easiest Case

- Name of the example program: firstExampleFunction.py

```
def displayInstructions ():  
    print ("Displaying instructions")
```

A red box highlights the function definition block.

**Function
definition**

Main body of code (starting execution point)

```
displayInstructions()  
print ("End of program")
```

A red box highlights the function call in the main body of code.

Function call

Defining The Main Body Of Code As A Function

- Rather than defining instructions outside of a function the main starting execution point can also be defined explicitly as a function.
- (The previous program rewritten to include an explicit main function) “firstExampleFunction2.py”

```
def displayInstructions ():  
    print ("Displaying instructions")
```

```
def main ():  
    displayInstructions()  
    print ("End of program")
```

Important: If you explicitly define the main function, do not forget to explicitly call it! **Don't forget to start your program!**

Functions Should Be Defined Before They Can Be Called!

- **Correct** ☺

```
def fun ():  
    print ("Works") } Function  
                    } definition
```

```
# main  
fun () } Function  
      } call
```

- **Incorrect** ☹

```
fun () } Function  
      } call
```

```
def fun ():  
    print ("Doesn't work") } Function  
                          } definition
```

Another Common Mistake

- Forgetting the brackets during the function call:

```
def fun ():  
    print ("In fun")
```

Main function

```
print ("In main")  
fun
```

Another Common Mistake

- Forgetting the brackets during the function call:

```
def fun ():  
    print ("In fun")
```

Main function

```
print ("In main")  
fun
```

The missing set
of brackets
does not
produce a
translation error

Another Common Problem: Indentation

- Recall: In Python indentation indicates that statements are part of the body of a function.
- (In other programming languages the indentation is not a mandatory part of the language but indenting is considered good style because it makes the program easier to read).

- Forgetting to indent:

```
def main ():  
    print ("main")
```

```
main ()
```

Another Common Problem: Indentation (2)

- Inconsistent indentation:

```
def main ():  
    print ("first"  
    print "second")
```

```
main ()
```

Yet Another Problem: Creating 'Empty' Functions

```
def fun ():
```

```
# Main  
fun()
```

Problem: This statement appears to be a part of the body of the function but it is not indented???!!!

Yet Another Problem: Creating 'Empty' Functions (2)

```
def fun ():  
    print ()
```

```
# Main  
fun()
```

A function must have at least one statement

Alternative (writing an empty function: literally does nothing)

```
def fun ():  
    pass
```

```
# Main  
fun ()
```

What You Know: Declaring Variables

- Variables are memory locations that are used for the temporary storage of information.

num = 0 num 0 **RAM**

- Each variable uses up a portion of memory, if the program is large then many variables may have to be declared (a lot of memory may have to be allocated to store the contents of variables).

What You Will Learn: Using Variables That Are Local To A Function

- To minimize the amount of memory that is used to store the contents of variables only declare variables when they are needed.
- When the memory for a variable is no longer needed it can be 'freed up' and reused.
- To set up your program so that memory for variables is only allocated (reserved in memory) as needed and de-allocated when they are not (the memory is free up) variables should be declared as local to a function.

What You Will Learn: Using Variables That Are Local To A Function (2)

Function call (*local variables get allocated in memory*)

Function ends (*local variables get de-allocated in memory*)

The program code in the function executes (the variables are used to store information for the function)

Where To Create Local Variables

```
def <function name> ():  
    Somewhere within  
    the body of the  
    function (indented  
    part)
```

Example:

```
def fun ():  
    num1 = 1  
    num2 = 2
```

Working With Local Variables: Putting It All Together

- Name of the example program:

secondExampleFunction.py

```
def fun ():
```

```
    num1 = 1
```

```
    num2 = 2
```

```
    print (num1, " ", num2)
```


```
# Main function
```

```
fun()
```

Variables that
are local to
function 'fun'

Another Reason For Creating Local Variables

- To minimize side effects (unexpected changes that have occurred to variables after a function has ended e.g., a variable storing the age of the user takes on a negative value).
- To picture the potential problem, imagine if all variables could be accessed anywhere in the program (not local).

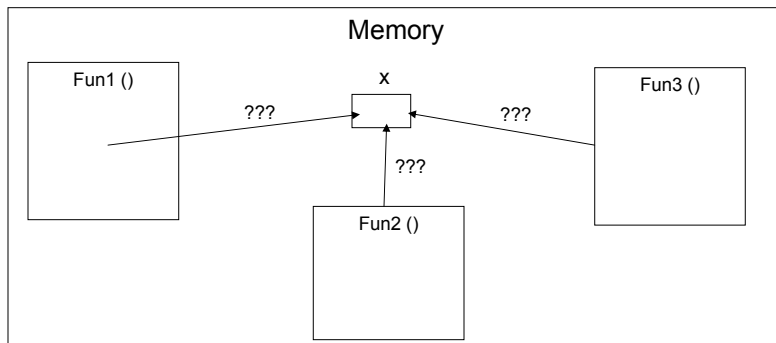

New Problem: Local Variables Only Exist Inside A Function

```
def display ():
```

```
    print ("")
```

```
    print ("Celsius value: ", celsius)
```

```
    print ("Fahrenheit value .:", fahrenheit)
```

What is 'celsius'???

What is 'fahrenheit'???

```
def convert ():
```

```
    celsius = float(input ("Type in the celsius temperature: "))
```

```
    fahrenheit = celsius * 9 / 5 + 32
```

```
    display ()
```

Variables celsius
and fahrenheit are
local to function
'convert'

Solution: Parameter Passing

- Variables exist only inside the memory of a function:

convert

celsius

fahrenheit

Parameter passing:
communicating information
about local variables
(arguments) into a function

display

Celsius? I know that value!

Fahrenheit? I know that value!

Parameter Passing (Function Definition)

- Format:**

def *<function name>* (*<parameter 1>*, *<parameter 2>*...):

- Example:**

def display (celsius, fahrenheit):

Parameter Passing (Function Call)

- Format:**

<function name> (*<parameter 1>*, *<parameter 2>*...)

- Example:**

display (celsius, fahrenheit):

Memory And Parameter Passing

- Parameters passed as arguments into functions become variables in the local memory of that function.

```
def fun (num1):  
    print (num1)  
    num2 = 20  
    print (num2)  
  
def main ():  
    num1 = 1  
    fun (num1)  
  
main ()
```

Parameter num1: local to fun

num2: local to fun

num1: local to main

Parameter Passing: Putting It All Together

- Name of the example program: temperature.py

```
def introduction ():  
    print ("""  
Celsius to Fahrenheit converter  
-----  
This program will convert a given Celsius temperature to an equivalent  
Fahrenheit value.  
""")
```

Parameter Passing: Putting It All Together (2)

```
def display (celsius, fahrenheit):
    print ("")
    print ("Celsius value: ", celsius)
    print ("Fahrenheit value:", fahrenheit)

def convert ():
    celsius = float(input ("Type in the celsius temperature: "))
    fahrenheit = celsius * 9 / 5 + 32
    display (celsius, fahrenheit)

# Main function
def main ():
    introduction ()
    convert ()

main ()
```

The Type And Number Of Parameters Must Match!

•Correct 😊:

```
def fun1 (num1, num2):
    print (num1, num2)
```

```
def fun2 (num1, str1):
    print (num1, str1)
```

main

```
def main ():
    num1 = 1
    num2 = 2
    str1 = "hello"
    fun1 (num1, num2)
    fun2 (num1, str1)
```

```
main ()
```

Two parameters (a number and a string) are passed into the call for 'fun2' which matches the type for the two parameters listed in the definition for function 'fun2'

Two numeric parameters are passed into the call for 'fun1' which matches the two parameters listed in the definition for function 'fun1'

Another Common Mistake: The Parameters Don't Match

•Incorrect ☹:

```
def fun1 (num1):  
    print (num1, num2)
```

```
def fun2 (num1, num2):  
    num1 = num2 + 1  
    print (num1, num2)
```

main

```
def main ():  
    num1 = 1  
    num2 = 2  
    str1 = "hello"  
    fun1 (num1, num2)  
    fun2 (num1, str1)
```

```
main ()
```

Two parameters (a number and a string) are passed into the call for 'fun2' but in the definition of the function it's expected that both parameters are numeric.

Two numeric parameters are passed into the call for 'fun1' but only one parameter is listed in the definition for function 'fun1'

Default Parameters

- Can be used to give function arguments some default values if none are provided.

- Example function definition:

```
def fun (x = 1, y = 1):  
    print (x, y)
```

- Example function calls (both work):

- fun ()
- fun (2, 20)

Good Style: Functions

1. Each function should have one well defined task. If it doesn't then it may be a sign that it should be decomposed into multiple sub-functions.
 - a) Clear function: A function that converts lower case input to capitals.
 - b) Ambiguous function: A function that prompts for a string and then converts that string to upper case.
2. (Related to the previous point). Functions should have a self descriptive name: the name of the function should provide a clear indication to the reader what task is performed by the function.
 - a) Good: isNum, isUpper, toUpper
 - b) Bad: dolt, go
3. Try to avoid writing functions that are longer than one screen in size.
 - a) Tracing functions that span multiple screens is more difficult.

Good Style: Functions (2)

4. The conventions for naming variables should also be applied in the naming of functions.
 - a) Lower case characters only.
 - b) With functions that are named using multiple words capitalize the first letter of each word but the first (most common approach) or use the underscore (less common).


Parameter Passing

- What you know about scope: Parameters are used to pass the contents of variable into functions (because the variable is not in scope).

```
def fun1 ():  
    num = 10  
    fun2 (num)
```

```
def fun2 (num):  
    print num
```

New Problem: Results That Are Derived In One Function Only Exist In That Function

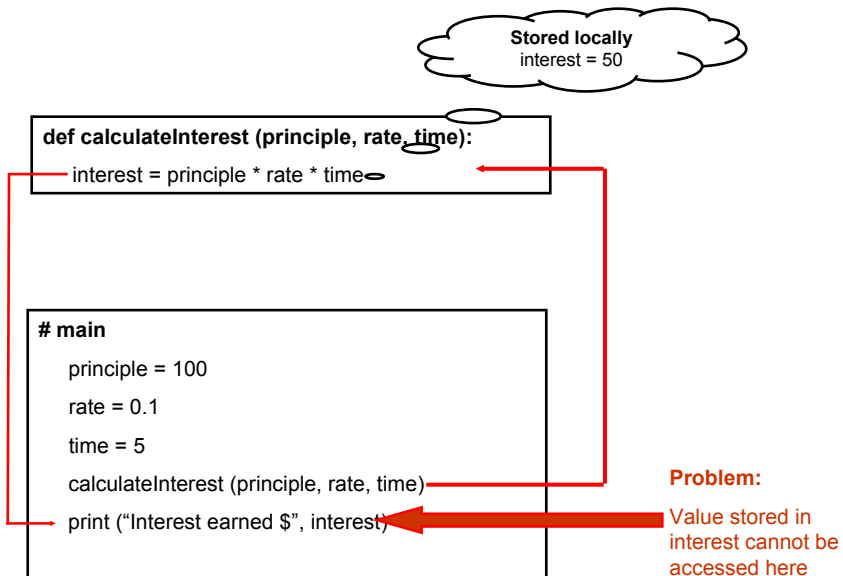

Solution: Have Function Return Values Back To The Caller

```
def calculateInterest (principle, rate, time):
```

```
    interest = principle * rate * time
```

```
    return interest
```

Variable
'interest' is local
to the function.

```
# main
```

```
principle = 100
```

```
rate = 0.1
```

```
time = 5
```

```
interest = calculateInterest (principle, rate, time)
```

```
print ("Interest earned $", interest)
```

The value stored in the
variable 'interest' local
to 'calculateInterest' is
passed back and stored
in a variable that is local
to the main function.

Using Return Values

•Format (Single value returned):

```
return <value returned>
```

```
# Function definition
```

```
<variable name> = <function name> ()
```

```
# Function call
```

•Example (Single value returned):

```
return interest
```

```
# Function definition
```

```
interest = calculateInterest (principle, rate, time)
```

```
# Function call
```


Using Return Values

- **Format (Multiple values returned):**

```
return <value1>, <value 2>...           # Function definition
<variable 1>, <variable 2>... = <function name> () # Function call
```

- **Example (Multiple values returned):**

```
return principle, rate, time           # Function definition
principle, rate, time = getInputs (principle, rate, time) # Function call
```

Using Return Values: Putting It All Together

- Name of the example program: interest.py

```
def introduction ():
    print ("""
Simple interest calculator
-----
With given values for the principle, rate and time period this program
will calculate the interest accrued as well as the new amount (principle
plus interest).
""")
```

Using Return Values: Putting It All Together (2)

```
def getInputs ():
    principle = float (input("Enter the original principle: "))
    rate = float(input("Enter the yearly interest rate %"))
    rate = / 100.0
    time = input("Enter the number of years that money will be invested:
                ")
    time = float(time)
    return principle, rate, time

def calculate (principle, rate, time):
    interest = principle * rate * time
    amount = principle + interest
    return interest, amount
```

Using Return Values: Putting It All Together (3)

```
def display (principle, rate, time, interest, amount):
    temp = rate * 100
    print ("")
    print ("Investing $%.2f" %principle, "at a rate of %.2f" %temp, "%")
    print ("Over a period of %.0f" %time, "years...")
    print ("Interest accrued $", interest)
    print ("Amount in your account $", amount)
```

Using Return Values: Putting It All Together (4)

Main function

```
def main ():
    principle = 0
    rate = 0
    time = 0
    interest = 0
    amount = 0


    introduction ()
    principle, rate, time = getInputs ()
    interest, amount = calculate (principle, rate, time)
    display (principle, rate, time, interest, amount)

main ()
```

Yet Another Common Mistake: Not Saving Return Values

- Just because a function returns a value does not automatically mean the value will be usable by the caller of that function.

```
def fun ():
    return 1
```

 This value has to be stored or used
in some expression by the caller

- That is because return values have to be explicitly saved by the caller of the function.

• Example

```
def fun ():
    length = 4
    width = 3
    area = length * width
    return area
```

```
# MAIN
area = 0
fun ()
print area
```

```
# Fixed MAIN
area = 0
area = fun ()
print area
```

Local Variables


- What you know:
 - How to declare variables that only exist for the duration of a function call.
 - Why should variables be declared locally.
- What you will learn:
 - How scoping rules determine where variables can be accessed.
 - The difference between local and global scope.

Scope

- The scope of an identifier (variable, constant) is where it may be accessed and used.
- In Python¹:
 - An identifier comes into scope (becomes visible to the program and can be used) after it has been declared.
 - An identifier goes out of scope (no longer visible so it can no longer be used) at the end of the indented block where the identifier has been declared.

¹ The concept of scoping applies to all programming languages. The rules for determining when identifiers come into and go out of scope will vary.

Scope: An Example

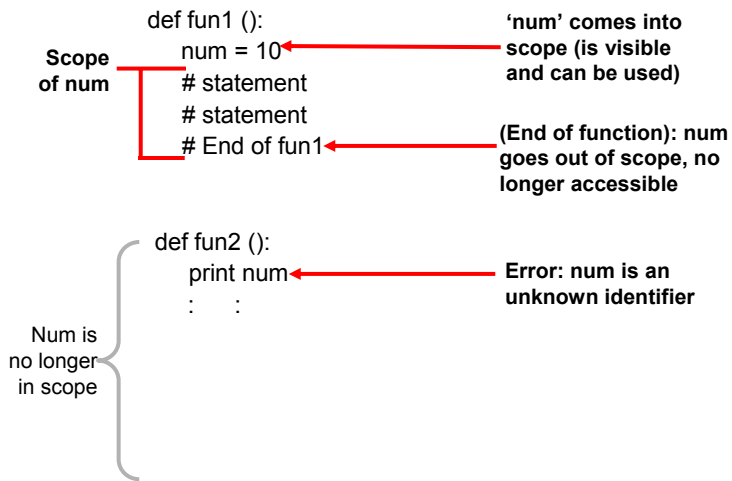

Scope: A Variant Example

```
def fun1 ():  
    num = 10  
    # statement  
    # statement  
    # End of fun1  
  
def fun2 ():  
    fun1 ()  
    num = 20  
    :  
    :
```

What happens at this point?

Why?

Global Scope

- Identifiers (constants or variables) that are declared within the body of a function have a local scope (the function).


```
def fun ():  
    num = 12  
# End of function fun
```



Scope of num is the function

- Identifiers (constants or variables) that are declared outside the body of a function have a global scope (the program).

```
num = 12  
def fun1 ():  
    # Instruction  
  
def fun2 ():  
    # Instruction  
  
# End of program
```

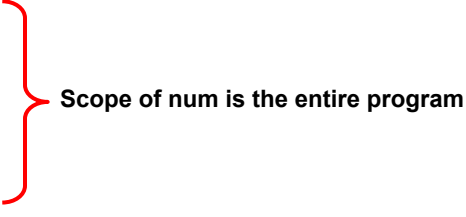

Scope of num is the entire program

Global Scope: An Example

- Name of the example program: globalExample1.py

```
num1 = 10  
  
def fun ():  
    print (num1)  
  
def main ():  
    fun ()  
    print (num2)  
  
num2 = 20  
  
main ()
```

Global Variables: General Characteristics

- You can access the contents of global variables anywhere in the program.
- In most programming languages you can also modify global variables anywhere as well.
 - This is why the usage of global variables is regarded as bad programming style, they can be accidentally modified anywhere in the program.
 - Changes in one part of the program can introduce unexpected side effects in another part of the program.
 - So unless you have a compelling reason you should NOT be using global variables but instead you should pass values as parameters.

Global Variables: Python Specific Characteristic

- Name of the example program: globalExample2.py

```
num = 1

def fun ():
    num = 2
    print (num)

def main ():
    print (num)
    fun ()
    print (num)

main ()
```

Python Globals: Read But Not Write Access

- By default global variables can be accessed globally (read access).
- Attempting to change the value of global variable will only create a new local variable by the same name (no write access).

```
num = 1 ← Global num  
def fun ():  
    num = 2 ← Local num  
    print (num)
```

- Prefacing the name of a variable with the keyword 'global' will indicate that all references in that function will then refer to the global variable rather than creating a local one.

```
global <variable name>
```

Globals: Another Example

- Name of the example program: globalExample3.py

```
num = 1  
  
def fun1 ():  
    num = 2  
    print (num)  
  
def fun2 ():  
    global num  
    num = 2  
    print (num)
```


Globals: Another Example (2)

```
def main ():  
    print (num)  
    fun1 ()  
    print (num)  
    fun2 ()  
    print (num)
```

```
main ()
```

Function Pre-Conditions

- Specifies things that must be true when a function is called.

- Examples:

Precondition: Age must be a non-negative number

```
def convertCatAge (catAge):  
    humanAge = catAge * 7  
    return humanAge
```

Precondition: y is a numeric non-zero value

```
def divide (x, y):  
    z = x / y  
    return z
```

Function Post-Conditions

- Specifies things that must be true when a function ends.

- Example:

```
def absoluteValue (number):  
    if (number < 0):  
        number = number * -1  
    return number  
# Post condition: number is non-negative
```

Why Employ Problem Decomposition And Modular Design

- Drawback
 - Complexity – understanding and setting up inter-function communication may appear daunting at first.
 - Tracing the program may appear harder as execution appears to “jump” around between functions.
- Benefit
 - Solution is easier to visualize and create (decompose the problem so only one part of a time must be dealt with).
 - Easier to test the program (testing all at once increases complexity).
 - Easier to maintain (if functions are independent changes in one function can have a minimal impact on other functions, if the code for a function is used multiple times then updates only have to be made once).
 - Less redundancy, smaller program size (especially if the function is used many times throughout the program).
 - Smaller programs size: if the function is called many times rather than repeating the same code, the function need only be defined once and then can be called many times.

After This Section You Should Now Know

- How and why the top down approach can be used to decompose problems
 - What is procedural programming
- How to write the definition for a function
- How to write a function call
- How and why to declare variables locally
- How to pass information to functions via parameters
- Good programming principles for implementing functions
- How and why to return values from a function.
- What is the difference between a local and a global variable.
- How to implement and test and program that is decomposed into functions.
- Two approaches for problem solving.