

Introduction To Files In Python


In this section of notes you will learn how to read from and write to text files as well as how to design programs that can recover from runtime errors. To properly read dynamic file information, building variable sized 2D lists is introduced.


What You Need In Order To Read Information From A File

- 1. Open the file and associate the file with a file variable (the latter positions the "file pointer".
- 2. A command to read the information.
- 3. A command to close the file.

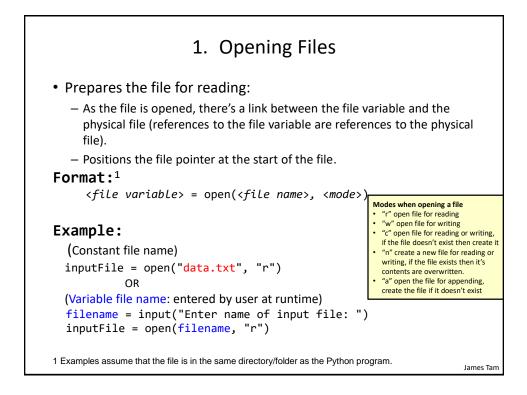

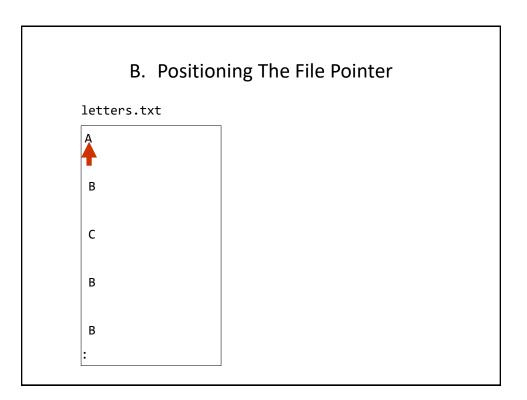

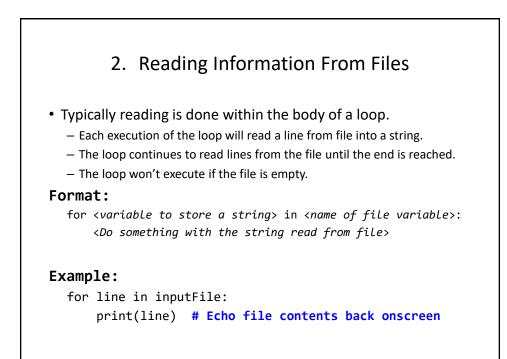






- Although a file is automatically closed when your program ends it is still a good style to explicitly close your file as soon as the program is done with it.
 - What if the program encounters a runtime error and crashes before it reaches the end? The input file may remain 'locked' an inaccessible state because it's still open.
- Format:

<name of file variable>.<close>()


• Example: inputFile.close()

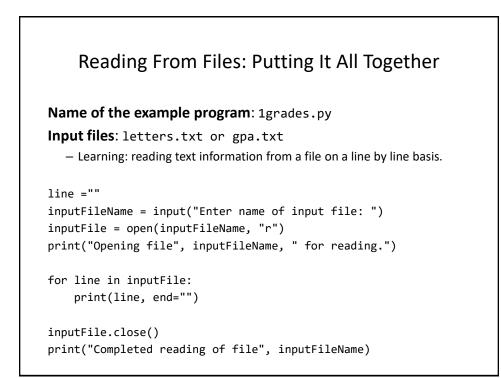


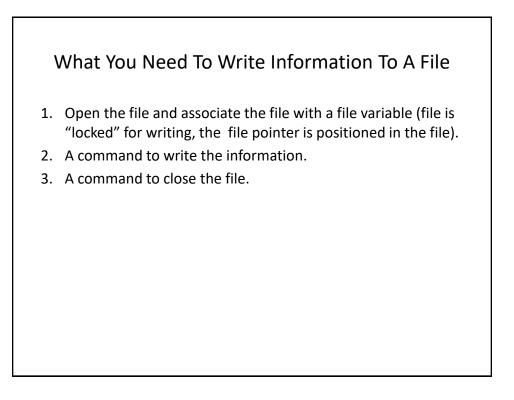


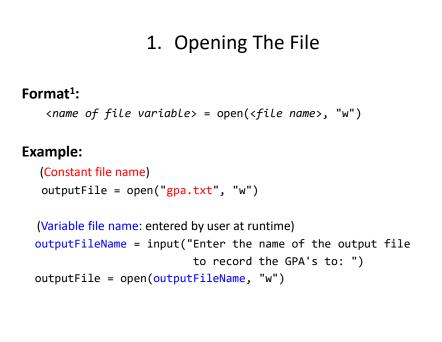

1 Typically the file is created in the same directory/folder as the Python program.

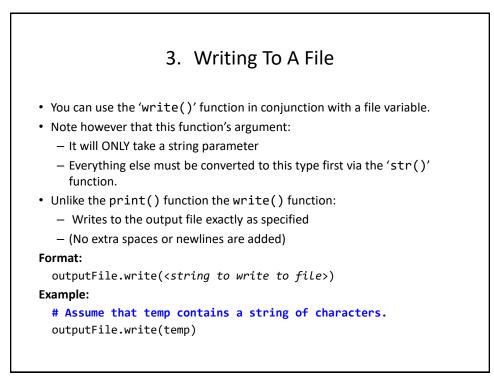

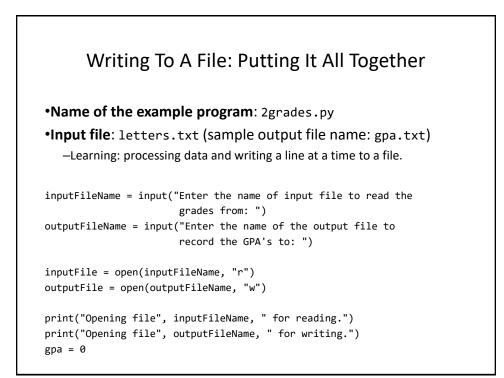

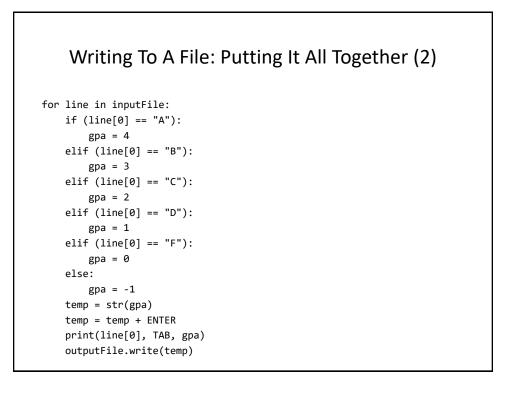

Writing To A File: Putting It All Together (3)

inputFile.close()
outputFile.close()
print("Completed reading of file", inputFileName)
print("Completed writing to file", outputFileName)

Reading From Files: Commonly Used Algorithm (If There Is Time)


• Pseudo-code:


Read a line from a file as a string


While (string is not empty)


process the line e.g. display onscreen, use data in some calculations etc.


Read another line from the file

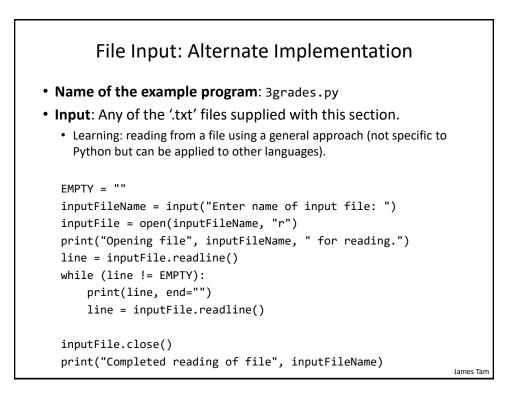


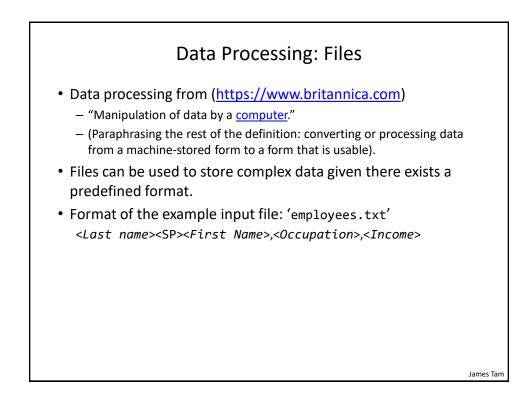


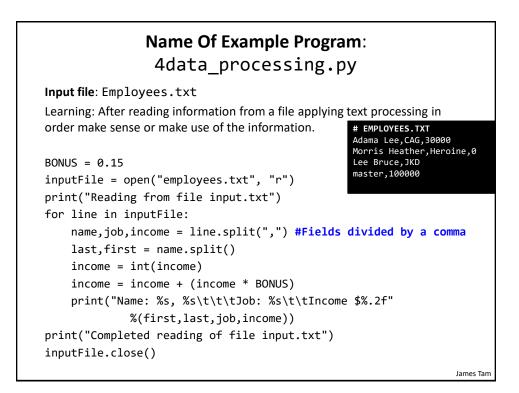


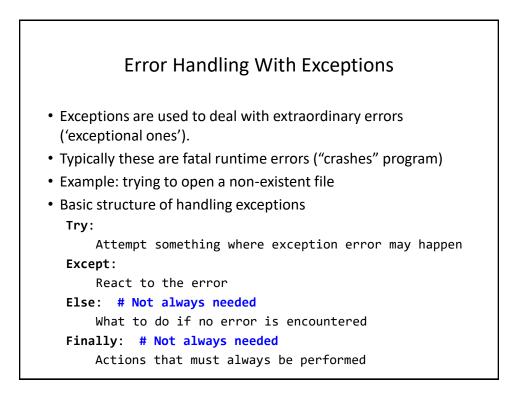


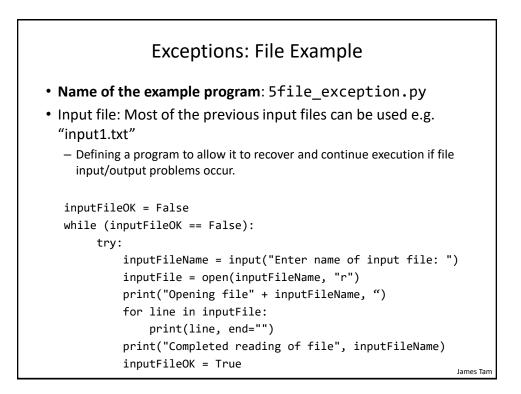

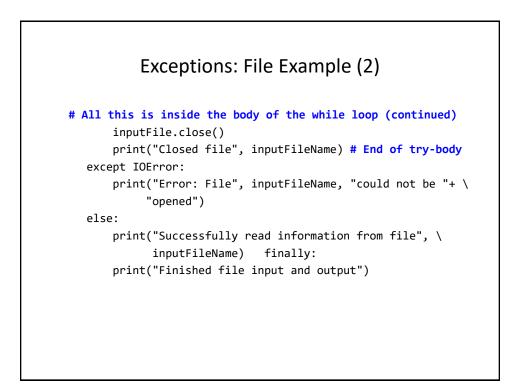

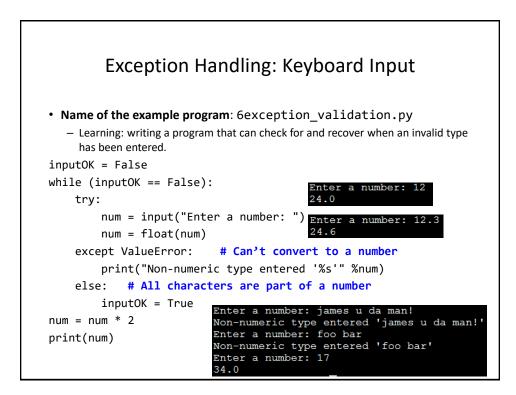


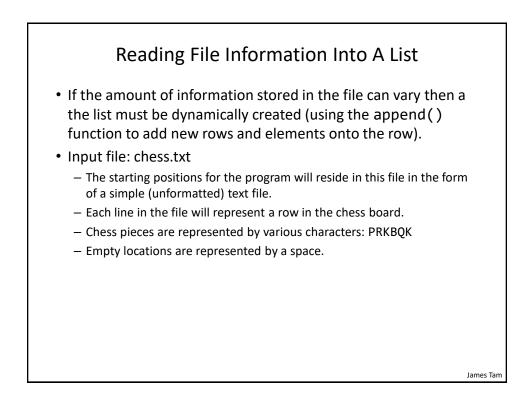


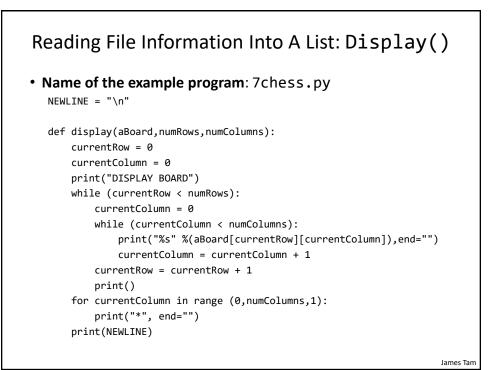


```
Reading File Information Into A List: Display Grid
  def displayWithGrid(aBoard,numRows,numColumns):
      currentRow = 0
      currentColumn = 0
      print("DISPLAY BOARD WITH GRID")
      while (currentRow < numRows):</pre>
          for currentColumn in range (0,numColumns,1):
              print(" -", end="")
          print()
          currentColumn = 0
          while (currentColumn < numColumns):</pre>
              print("|%s" %(aBoard[currentRow][currentColumn]),end="")
              currentColumn = currentColumn + 1
          currentRow = currentRow + 1
          print("|")
      for currentColumn in range (0,numColumns,1):
          print(" -", end="")
```


James Tam

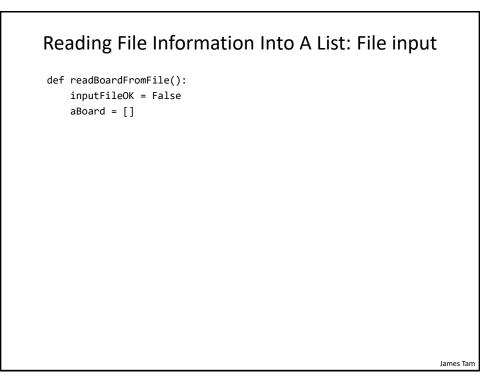

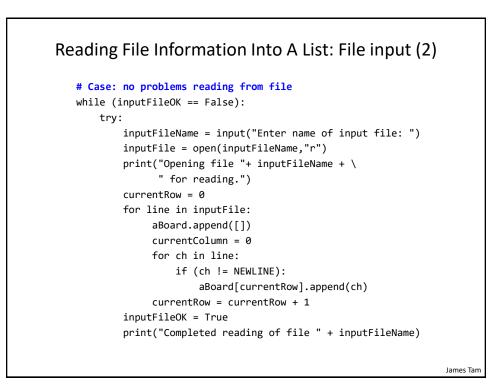

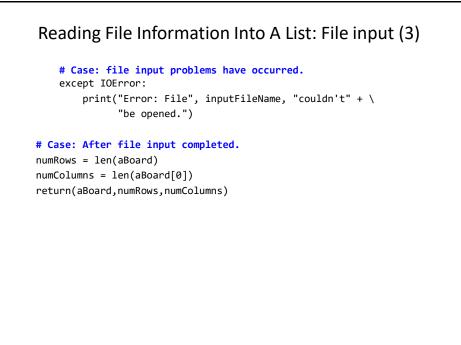

James Tam

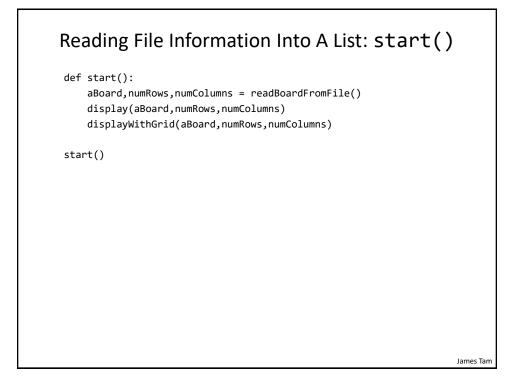

You Should Now Know

- How to open a file for reading
- How to open a file a file for writing
- The details of how information is read from and written to a file
- · How to close a file and why it is good practice to do this explicitly
- · How to read from a file of arbitrary size
- How to create a 2D list of variable size and with non-homogenous elements.
- Data storage and processing using files and string functions
- How exceptions can be used in conjunction with file input and with invalid keyboard/console input
- · How to read file information into a dynamically created list